


ELEV, DIM: M.

**PLATAFORMA NORTE  
NORTH APRON**





RÉGIMEN DE VARIACIÓN ANUAL  
ANNUAL RATE OF CHANGE:  
9.9' E

RESISTENCIA APN // APN STRENGTH:  
PCN 134/R/A/W/T EXC:  
PRKG 9 TO 19, 89, 111, H12:  
PCN 116/R/A/W/T,  
GATE A1, A2: PCN 86/F/A/W/T,  
GATE B: PCN 117/F/B/W/T.

APN LGT:  
BORDE, POSTES PROYECTORES Y EJE.  
EDGE, FLOODLIGHTING POLES AND CENTRE LINE.

SISTEMA DE GUÍA DE ATRAQUE VISUAL EN PRKG:  
VISUAL DOCKING GUIDANCE SYSTEM AT PRKG:  
1, 2, 3, 4, 5, 6, 6A.

PROCEDIMIENTOS GENERALES DE RODAJE Y  
PROCEDIMIENTOS DE VISIBILIDAD REDUCIDA:  
VER AD 2-LEBB CASILLAS 20 Y 22.  
STANDARD TAXIING PROCEDURES AND LOW  
VISIBILITY PROCEDURES: SEE AD 2-LEBB ITEMS 20 AND 22.

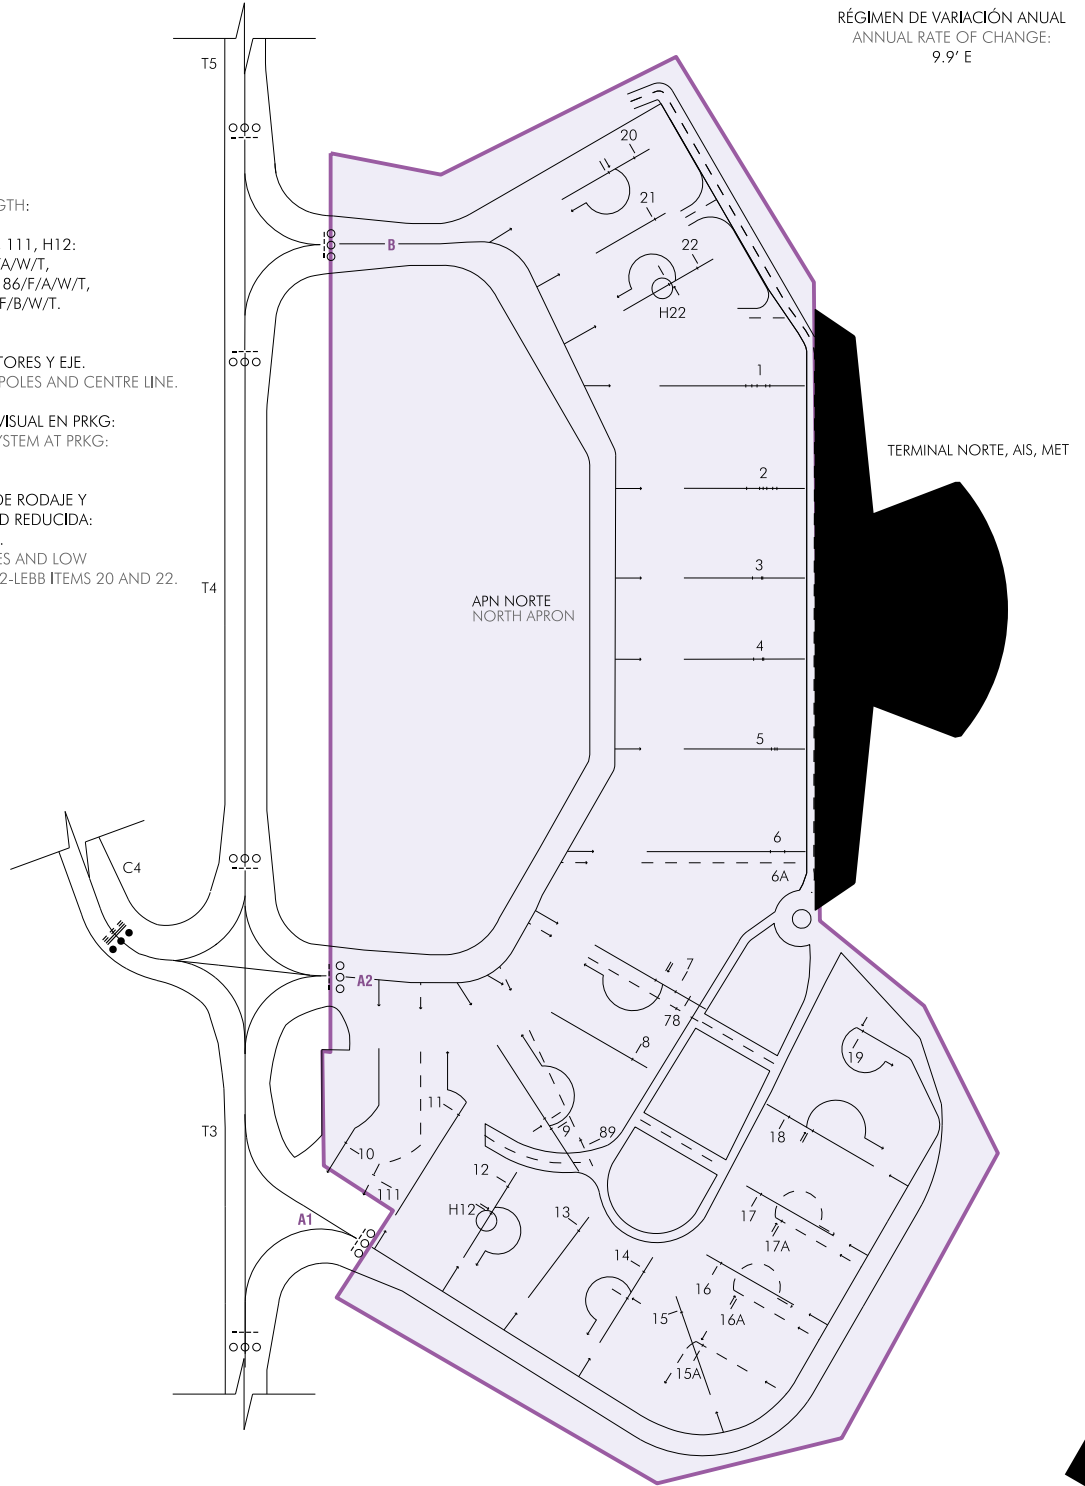

PRKG	1
LÍMITE DE PLATAFORMA APRON LIMIT	
PUNTOS DE TRASPASO-SIN COMUNICACIÓN HANDOVER POINTS-WITHOUT COMMUNICATION	A1