


FRUSTRADA: SUBIR EN RUMBO DE PISTA HASTA 1.6 DME ILS (R-074 PPN). VIRAR A LA IZQUIERDA (IAS MAX 175 kt CAT A, B & C Y 185 kt CAT D)
DIRECTO A CRUZAR L PP A 4000 ft O SUPERIOR, SUBIENDO A 5000 ft PARA INTEGRARSE A LA ESPERA.

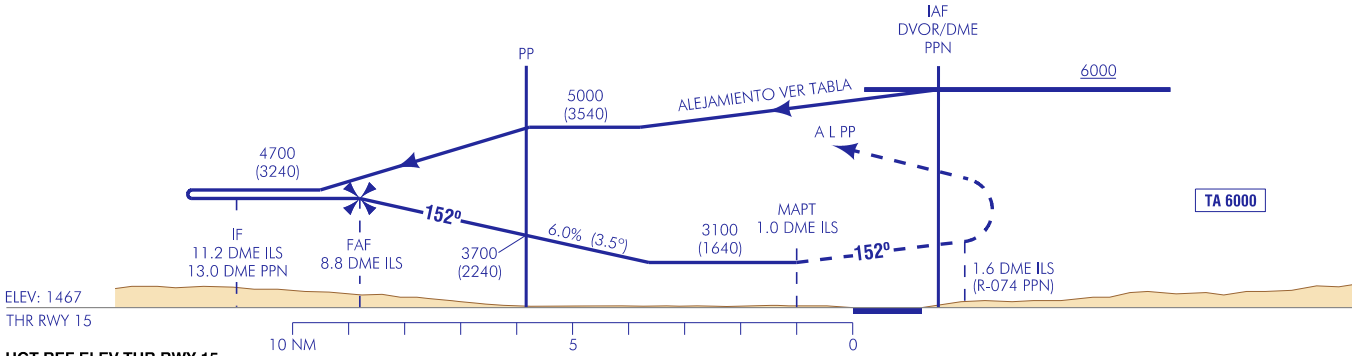

HGT REF ELEV THR RWY 15

OCA/H	A	B	C	D
STA	2.5%	3100 (1640)		
En circuito (H) sobre 1506	3100 (1600)	3620 (2120)	4700 (3200)	

GS	kt	80	100	120	140	160	180
FAF-THR:	min:s						
FAF-MAPT:	min:s						
ROD: 6.0 %	ft/min	490	612	735	857	980	1102
ALT/HGT DME (ILS) FNA							
13 DME	12 DME	11 DME	10 DME	9 DME	8 DME	7 DME	6 DME
					4460 (2990)	4090 (2630)	3730 (2260)
							3360 (1890)