

ESPAÑA

AIP-ESPAÑA

AIS-ESPAÑA

Dirección AFTN: LEANZXTA

Teléfono: +34 913 213 363

E-mail: ais@enaire.es

Web: www.enaire.es

ENAIRE
DIVISIÓN DE INFORMACIÓN AERONÁUTICA
c/ Campezo, 1. EDIFICIO 2
Kudos Innovation Campus Las Mercedes
28022 Madrid (ESPAÑA)

SUP 189/24

28-NOV-24

AD

CANCEL: SUP 172/24.

SUP 189/24

28NOV24/28NOV25EST

NOTE: EST SUP will only be cancelled by NOTAM, SUP or AIP amendment.

MENORCA AD (LEMH).- Pavement works on the apron.

Until 28 November 2025 (estimated), works to resurface the commercial aviation apron of Menorca airport will be underway.

The works will be carried out in four phases. The effective start and end dates of each phase, as well as any operational incidents that may arise, will be announced via the corresponding NOTAM.

All the working areas will be duly marked and lit, caution is recommended due to the presence of workers and machinery in operational hours.

No works will be performed when low visibility procedures are active.

PHASE 1


Upper - North Zone.

Complete reconstruction of the pavement, resurfacing of isolated slabs, repairing damage to slabs and replacement of markings will be carried out.

The works will be carried out in both operational and non-operational hours of the airport.

Operational Impacts:

- TWY J closed up to PRKG 5.
- PRKG 1, 2, 3, 4 and 5 out of service.
- PRKG 5A available.

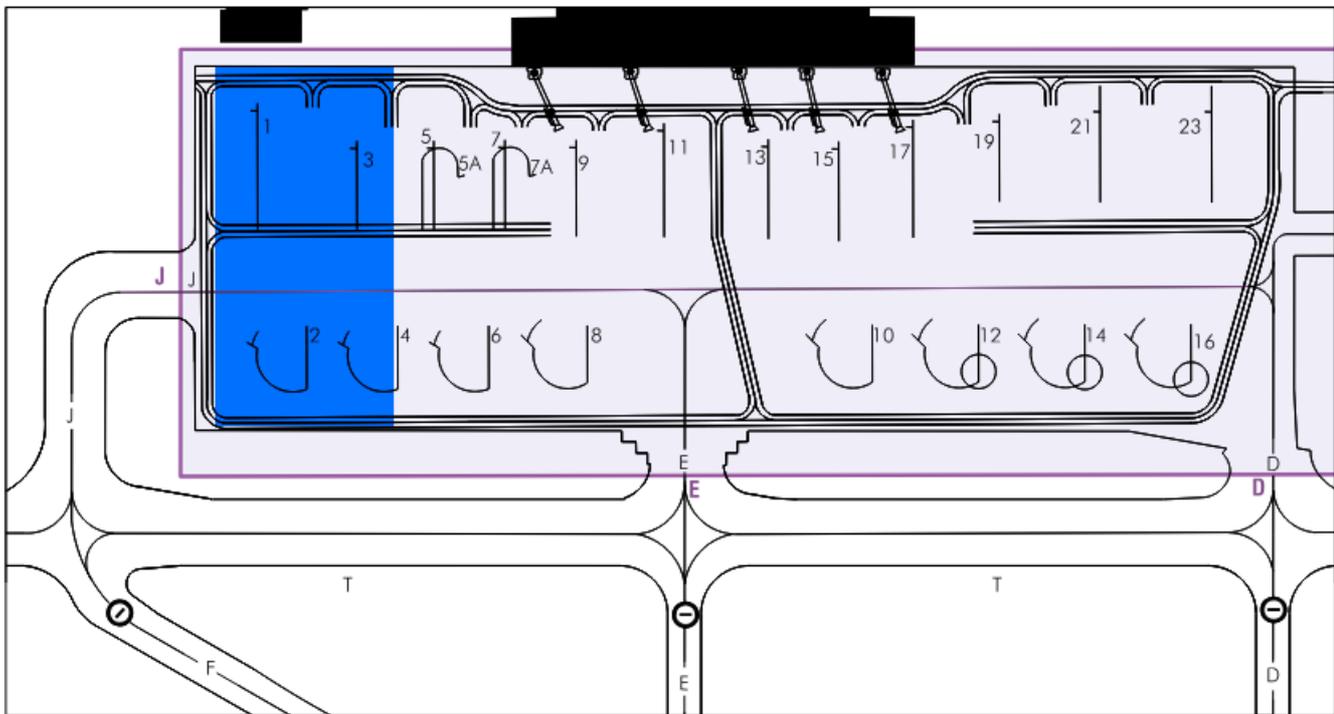

- ZONA DE TRABAJO // WORKING AREA
- LÍMITE DE PLATAFORMA // APRON LIMIT
- J PUNTOS DE TRASPASO // HANDOVER POINTS

PHASE 2


Lower - North Zone.

Complete reconstruction of the pavement, resurfacing of isolated slabs, repairing damage to slabs and replacement of markings will be carried out.

The works will be carried out in both operational and non-operational hours of the airport.

Operational Impacts:

- Closing of TWY E and TWY J from PRKG 4 to PRKG 13.
- PRKG 4, 5, 5A, 6, 7, 7A, 8, 9, 10, 11 and 13 out of service.

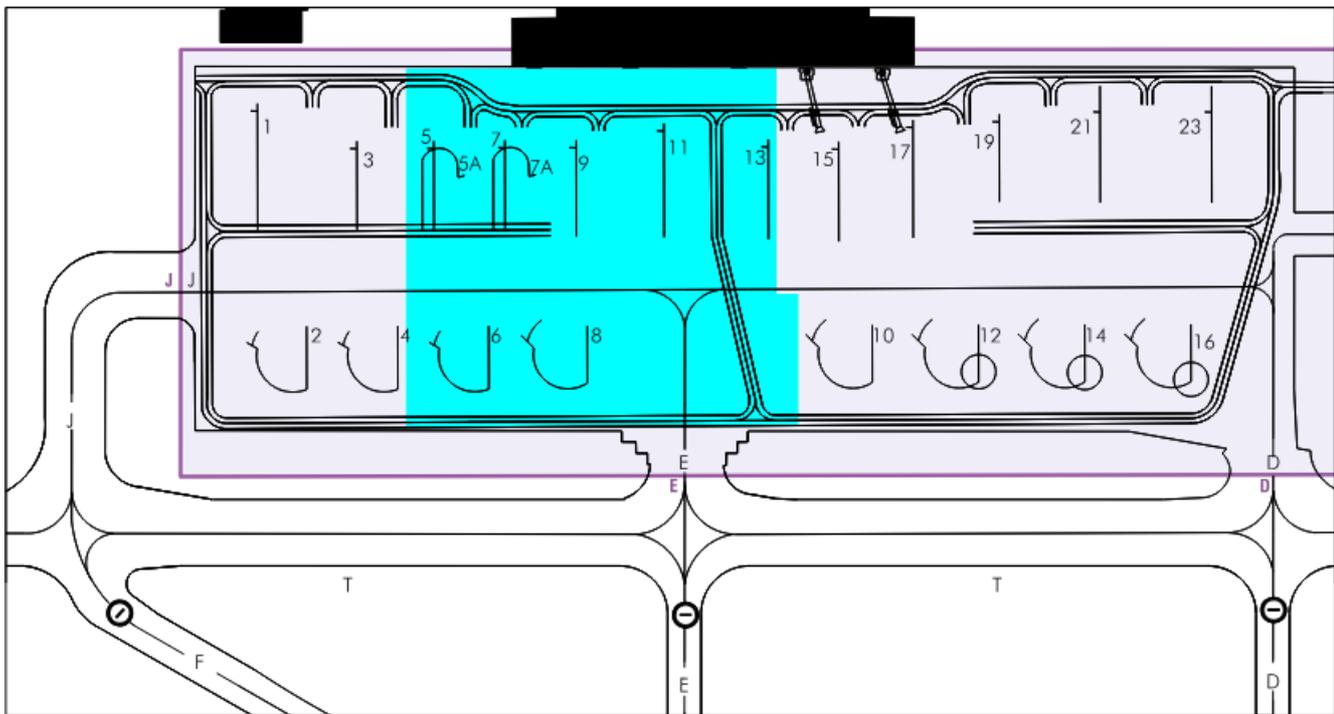

- ZONA DE TRABAJO // WORKING AREA
- LÍMITE DE PLATAFORMA // APRON LIMIT
- J PUNTOS DE TRASPASO // HANDOVER POINTS

PHASE 3


Upper - South Zone.

Repair and reconstruction work will be carried out on isolated slabs, together with the construction of new slabs and the replacement of markings.

The works will be carried out in both operational and non-operational hours of the airport.

Operational Impacts:

- TWY J closed from PRKG 10 to PRKG 19.
- PRKG 10, 12, 13, 15, 17 and 19 out of service.
- PRKG 11 only operational with heading South, exiting the apron via TWY E.

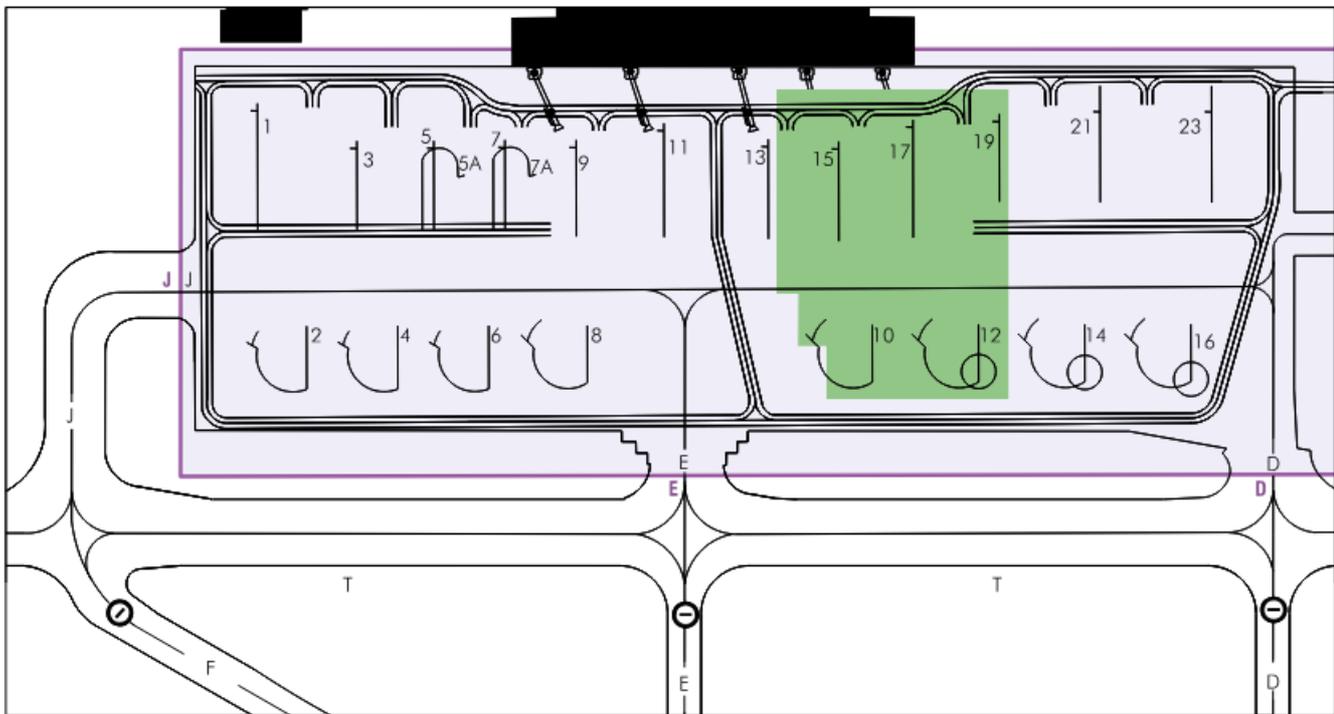

- ZONA DE TRABAJO // WORKING AREA
- ▭ LÍMITE DE PLATAFORMA // APRON LIMIT
- J PUNTOS DE TRASPASO // HANDOVER POINTS

PHASE 4


Lower - South Zone.

Repair and reconstruction work will be carried out on isolated slabs, together with the construction of new slabs and the replacement of markings.

The works will be carried out in both operational and non-operational hours of the airport.

Operational Impacts:

- TWY J closed from PRKG 10 to PRKG 19.
- PRKG 12, 14, 16, 17, 19, 21 and 23 out of service.
- Helicopter operations must request FOLLOW ME vehicle guidance to PRKG 8 and/or PRKG 10 as the helicopter stands are out of service.
- Code letter E-IV aircraft operations will not be accepted.

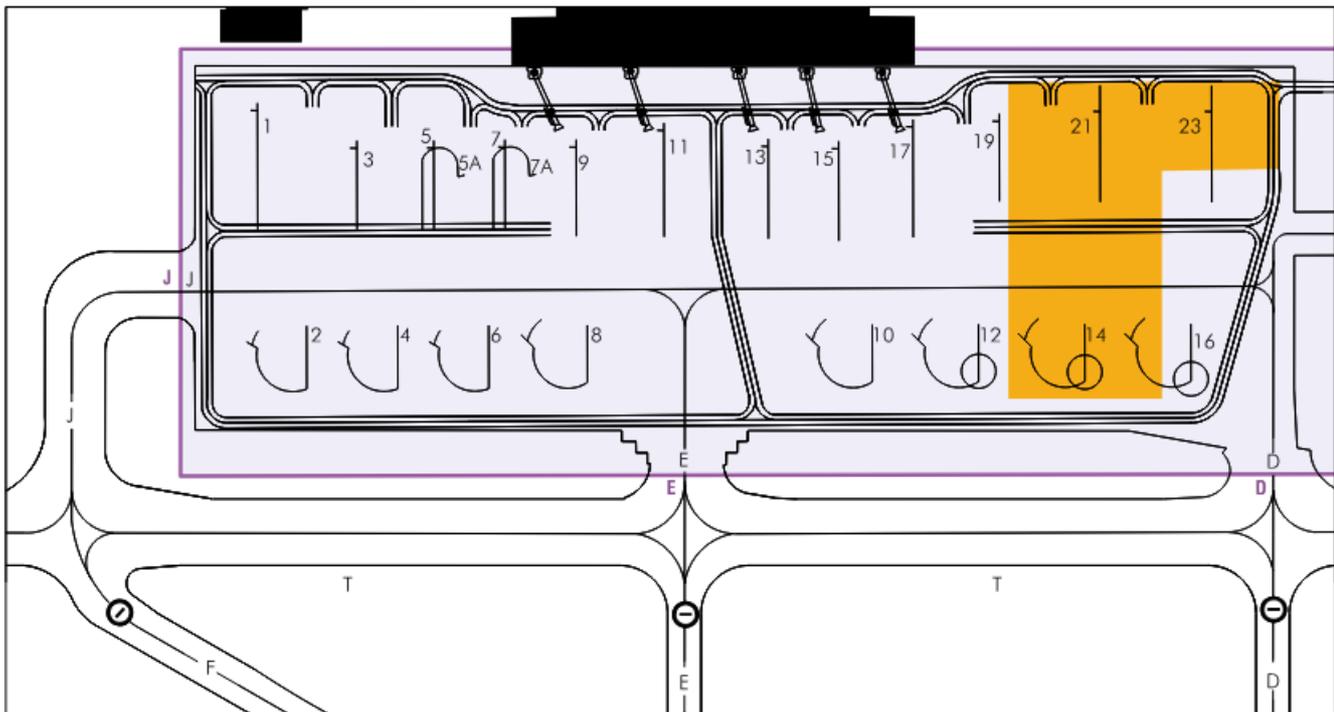

- ZONA DE TRABAJO // WORKING AREA
- LÍMITE DE PLATAFORMA // APRON LIMIT
- J PUNTOS DE TRASPASO // HANDOVER POINTS