

CARTA DE LLEGADA NORMALIZADA
VUELO POR INSTRUMENTOS (STAR) RNAV1 (GNSS)-OACI

TA 6000

VAR 0° (2020)


APP 118.350 MHz
TWR 118.350 MHz

PROCEDIMIENTOS DE LLEGADA
ARRIVAL PROCEDURES

AGDO3Q DOSEK2Q ESIL2Q KUNEN3G
KUNEN2Q RISP02Q VADAT2Q

- NOTES:
- (1) ALTITUD MÁXIMA DE ESPERA SUJETA A LA ACTIVIDAD DE LEBAS
 - (2) ALTITUD MÍNIMA DE ESPERA SUJETA A LA ACTIVIDAD DE LEBAS
 - SE REQUIERE APROBACIÓN RNAV1.
 - GNSS REQUERIDO.
 - AGDO3Q, DOSEK2Q, ESIL2Q, KUNEN2Q Y KUNEN3G SUJETAS A LA ACTIVIDAD DE LA LEBAS.

- NOTES:
- (1) HOLDING PATTERN MANTENER ALTITUD SUJETA TO LEBAS ACTIVITY
 - (2) HOLDING PATTERN MANTENER ALTITUD SUJETA TO LEBAS ACTIVITY
 - RNAV1 APPROVAL REQUIRED.
 - GNSS REQUIRED.
 - AGDO3Q, DOSEK2Q, ESIL2Q, KUNEN2Q AND KUNEN3G SUBJECT TO LEBAS ACTIVITY.

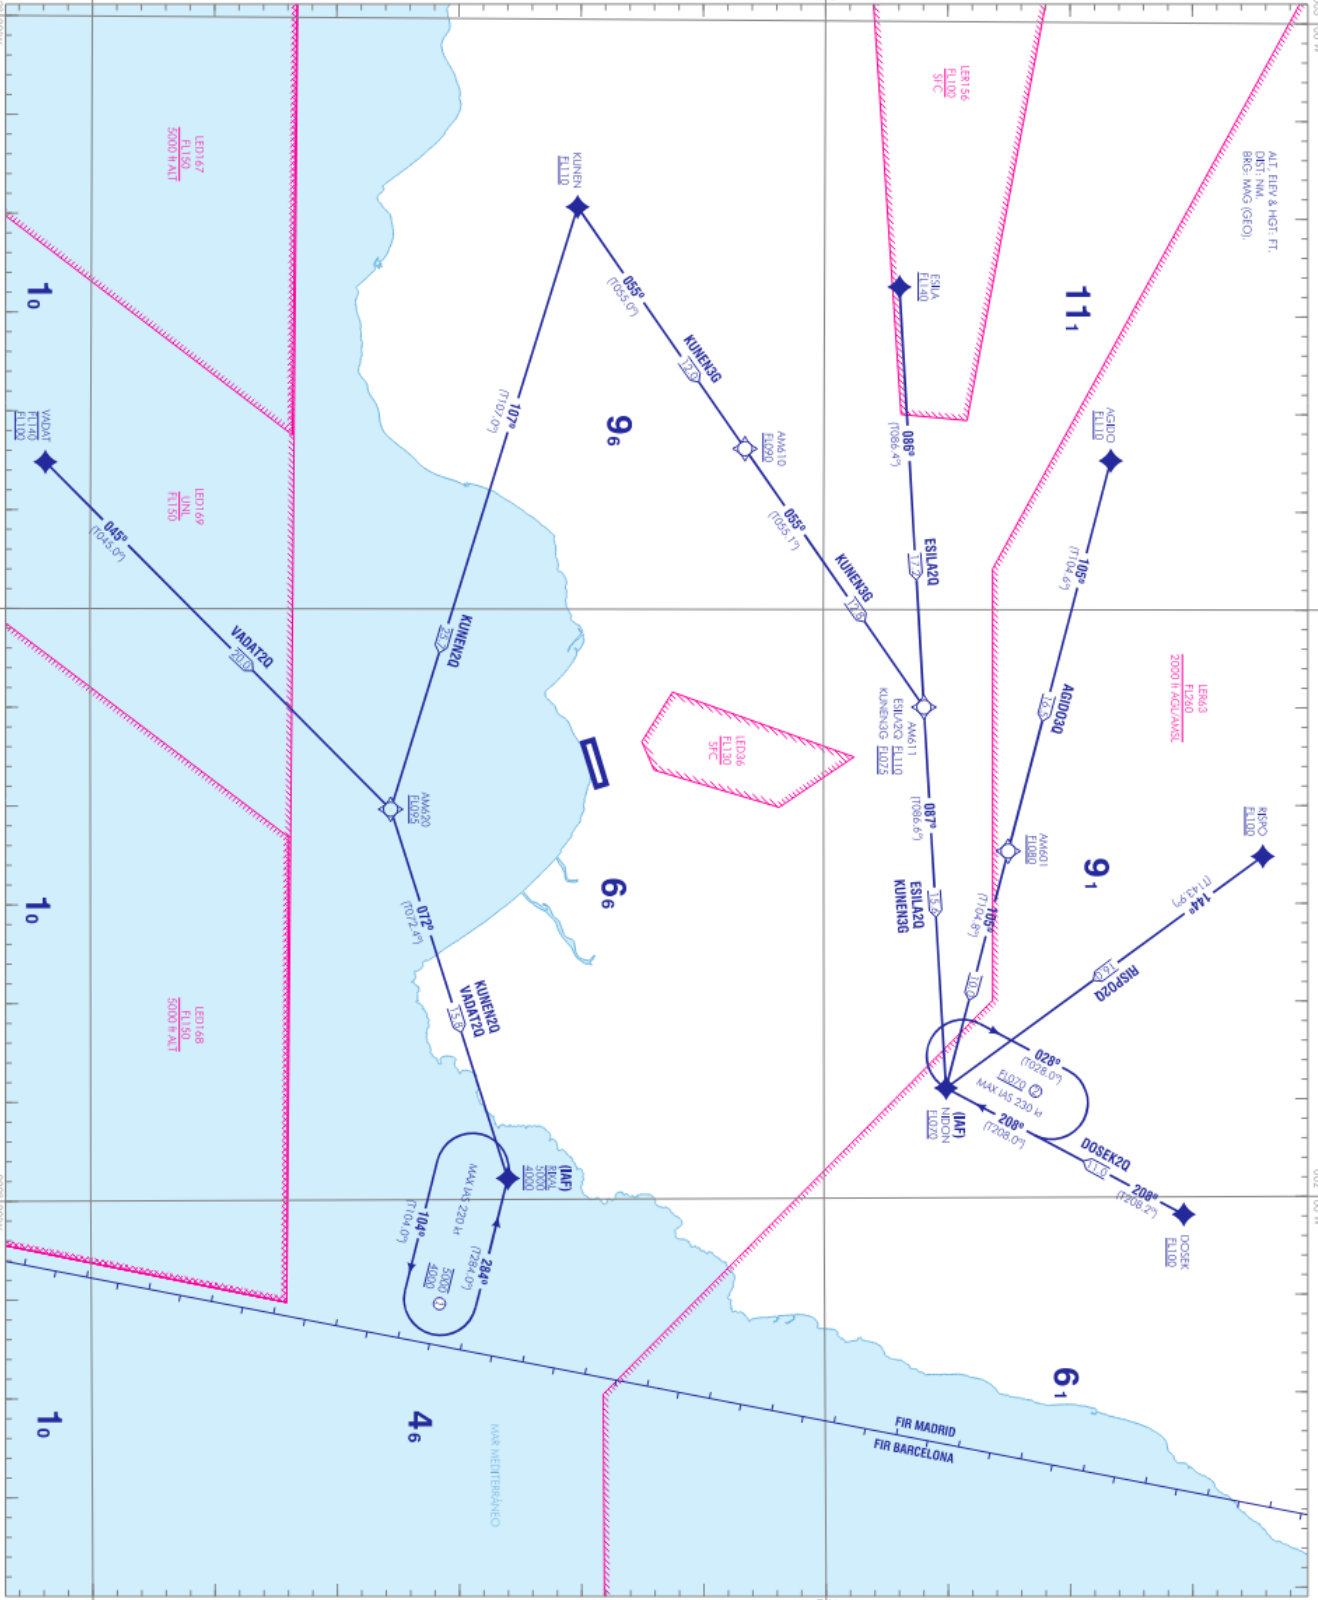

16-MAY-24 (AMDT 380/24)

AD 2-LEAM STAR 4.1

WAYPOINTS COORDINATES

WPT	COORD
AGIDO	371144.5N 0023737.0W
AM601	370734.1N 0021740.7W
AM610	365647.2N 0023810.9W
AM611	370407.4N 0022501.4W
AM620	364218.2N 0021949.7W
DOSEK	371443.3N 0015906.3W
ESILA	370305.1N 0024626.9W
KUNEN	364954.3N 0025026.7W
NIDON	370500.5N 0020535.6W
RISPO	371759.0N 0021724.1W
RIXAL	364704.1N 0020104.2W
VADAT	362809.9N 0023724.9W

STANDARD INSTRUMENT ARRIVALS (STAR) RNAV1 (GNSS)

RUNWAY 25

NOTES APPLICABLE TO ALL STAR:

- RNAV1 approval required.
- GNSS required.

PROCEDURE TABULAR DESCRIPTION

AGIDO3Q RNAV1 (GNSS)											
SUBJECT TO LER63 ACTIVITY.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	IF	AGIDO	–	–	-0.0	–	–	+FL110	–	–	RNAV1
002	TF	AM601	–	105 (104.6)	-0.0	16.5	–	+FL080	–	–	RNAV1
003	TF	NIDON	–	105 (104.8)	-0.0	10.0	–	+FL070	–	–	RNAV1

DOSEK2Q RNAV1 (GNSS)											
SUBJECT TO LER63 ACTIVITY.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	IF	DOSEK	–	–	-0.0	–	–	+FL100	–	–	RNAV1
002	TF	NIDON	–	208 (208.2)	-0.0	11.0	–	+FL070	–	–	RNAV1

ESILA2Q RNAV1 (GNSS)											
SUBJECT TO LER63 ACTIVITY.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	IF	ESILA	–	–	-0.0	–	–	+FL140	–	–	RNAV1
002	TF	AM611	–	086 (086.4)	-0.0	17.2	–	+FL110	–	–	RNAV1
003	TF	NIDON	–	087 (086.6)	-0.0	15.6	–	+FL070	–	–	RNAV1

KUNEN3G RNAV1 (GNSS)											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	KUNEN	–	–	-0.0	–	–	+FL110	–	–	RNAV1
002	TF	AM610	–	055 (055.0)	-0.0	12.0	–	+FL090	–	–	RNAV1
003	TF	AM611	–	055 (055.1)	-0.0	12.8	R	+FL075	–	–	RNAV1
004	TF	NIDON	–	087 (086.6)	-0.0	15.6	–	+FL070	–	–	RNAV1

KUNEN2Q RNAV1 (GNSS)											
SUBJECT TO LER63 ACTIVITY.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	KUNEN	–	–	-0.0	–	–	+FL110	–	–	RNAV1
002	TF	AM620	–	107 (107.0)	-0.0	25.7	–	+FL095	–	–	RNAV1
003	TF	RIXAL	–	072 (072.4)	-0.0	15.8	–	-5000 +4000	–	–	RNAV1

RISPO2Q RNAV1 (GNSS)											
SUBJECT TO LER63 ACTIVITY.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	RISPO	–	–	-0.0	–	–	+FL100	–	–	RNAV1
002	TF	NIDON	–	144 (143.9)	-0.0	16.0	–	+FL070	–	–	RNAV1

VADAT2Q RNAV1 (GNSS)											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	VADAT	–	–	-0.0	–	–	-FL140 +FL100	–	–	RNAV1
002	TF	AM620	–	045 (045.0)	-0.0	20.0	–	+FL095	–	–	RNAV1
003	TF	RIXAL	–	072 (072.4)	-0.0	15.8	–	-5000 +4000	–	–	RNAV1

HOLDING PATTERN											
Path terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance/ Outbound time	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navigation specification	
HM	NIDON	–	208 (208.0)	-0.0	1 min	R	FL070 (1)	–	-230	RNAV1	
HM	RIXAL	–	284 (284.0)	-0.0	1 min	L	4000	5000 (2)	-220	RNAV1	

Remarks:	
(1)	Subject to LER63 activity.
(2)	Subject to LED168 activity.