


CARTA DE APROXIMACIÓN POR INSTRUMENTOS-MIPS

ELEV AD
86
VAR 1°W (2020)


APP 128.500
TWR 119.750
GCA 134.100
GMC 130.700
ATIS 267.600

CÁDIZ/Rota
LOC X
RWY 10

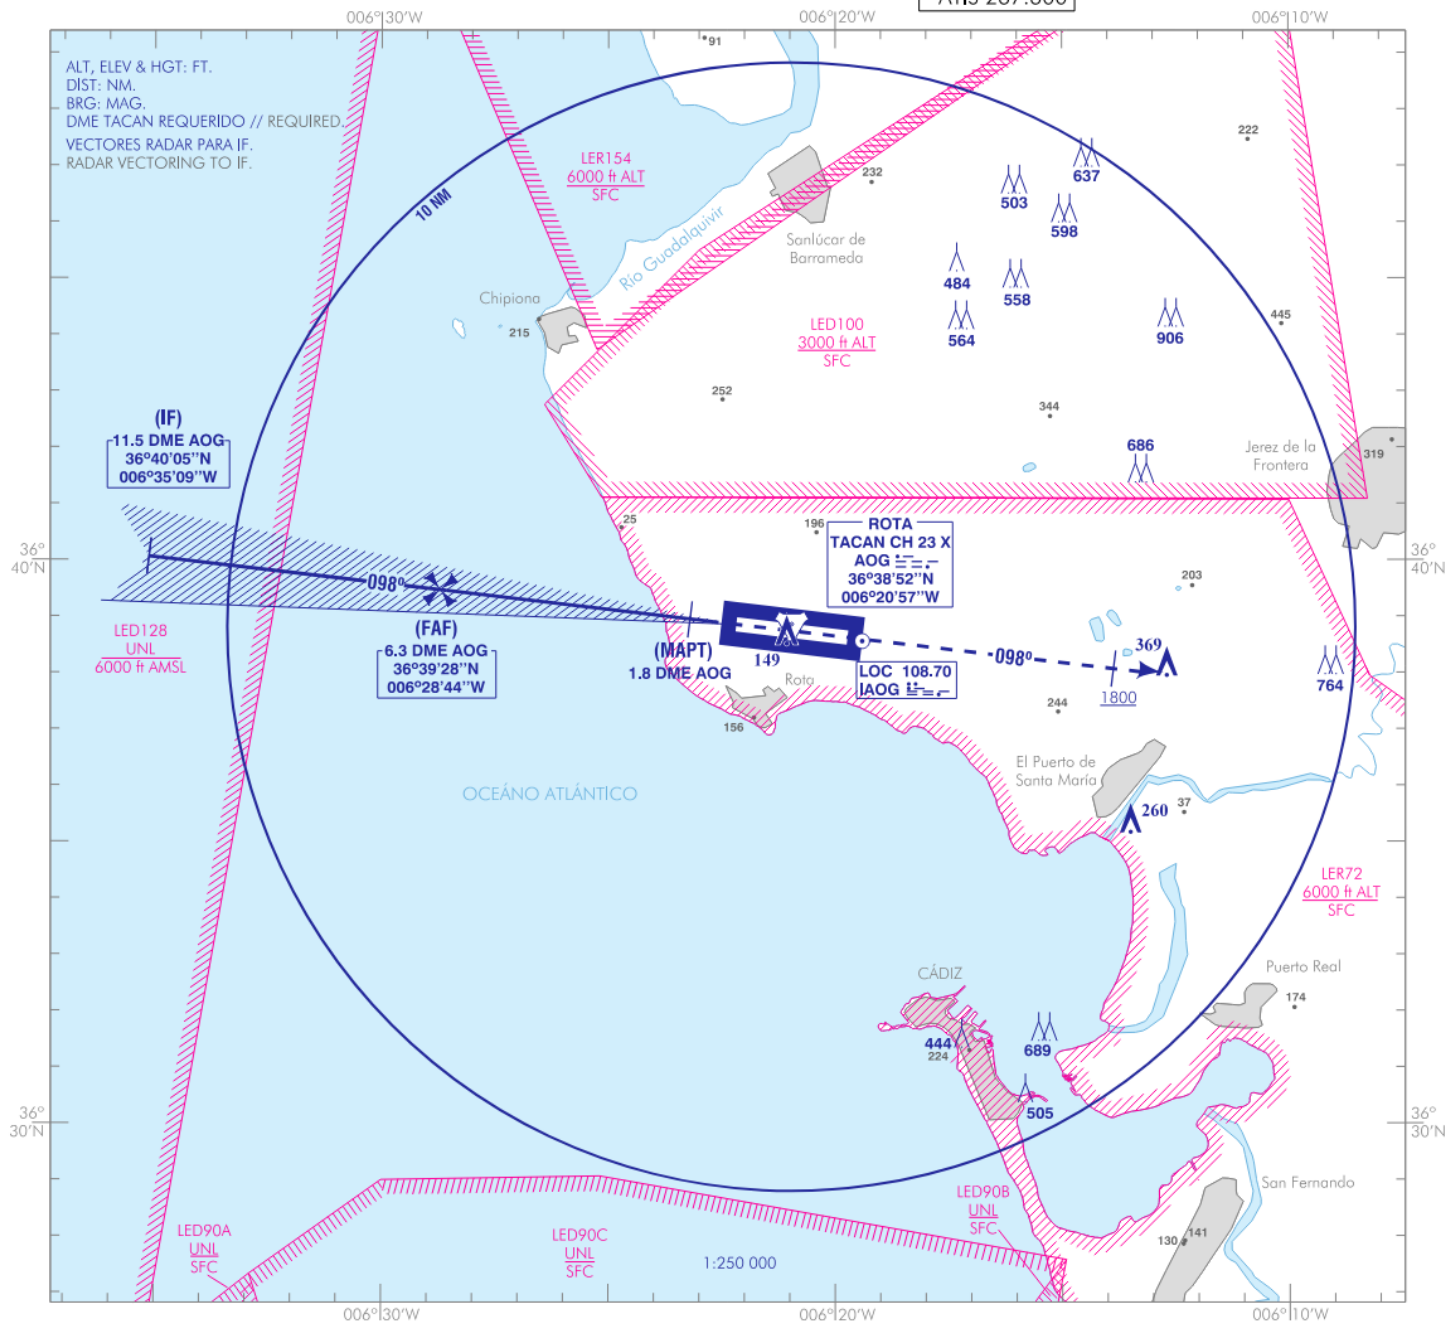

FRUSTRADA: ASCENDER EN RUMBO 098° A 1800 O SUPERIOR. ESPERAR VECTORES RADAR.
MISSED APCH: CLIMB ON HEADING 098° TO 1800 OR ABOVE. EXPECT RADAR VECTORIZING.

NOTAS:
- SE REQUIEREN VECTORES RADAR PARA TRAMO FINAL CUANDO LED128 ESTÁ ACTIVADA, BTN SFC Y 6000.
NOTES:
- RADAR VECTORIZING REQUIRED FOR FINAL LEG WHEN LED128 ACTIVATED, BTN SFC AND 6000.

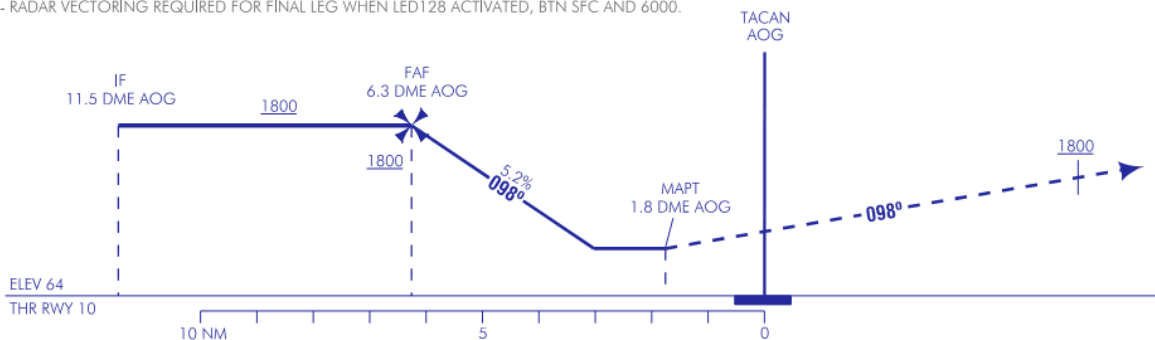


HGT REF ELEV THR RWY 10

CAT	A	B	C	D
S-LOC	400-1.5 340 (400-1.5)			
Circuito Circling	520-1.5 440 (500-1.5)	580-1.6 500 (500-1.6)	740-2.4 660 (700-2.4)	1010-3.6 930 (1000-3.6)

GS	kt	80	100	120	140	160	180
FAF-THR:	mins	3:22	2:41	2:15	1:55	1:41	1:30
FAP-MAPT: 4.5	mins	3:22	2:41	2:15	1:55	1:41	1:30
ROD: 5.2 %	ft/min	424	530	636	742	848	954

ALT/HGT DME (AOG) FNA											
13	12	11	10	9	8	7	6	5	4	3	2
							1710	1390	1070	760	440

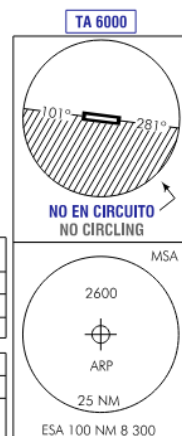

CAMBIO: CORRECCIÓN EDITORIAL.
CHANGES: FORMAL EDITING.

07-SEP-23 (AMDT 371/23)

AIP-ESPAÑA

AD 2-LERT IAC/6.1

REQUISITOS DE LA BASE DE DATOS AERONÁUTICA

AERONAUTICAL DATABASE REQUIREMENTS

PROCEDIMIENTOS DE APROXIMACIÓN POR INSTRUMENTOS
INSTRUMENT APPROACH PROCEDURES

LOC X RWY 10

PUNTO	LAT	LONG	AZIMUT VERDADERO	DISTANCIA DME (NM)
POINT	LAT	LONG	TRUE BEARING	DME DISTANCE (NM)
IF	36°40'04.9"N	006°35'09.3"W	276.91° (IAOG)	11.50 DME AOG
FAF	36°39'27.9"N	006°28'43.7"W	276.91° (IAOG)	6.29 DME AOG
MAPT	36°38'55.7"N	006°23'11.1"W	276.91° (IAOG)	1.80 DME AOG
Aproximación final de no precisión - Ángulo de descenso (Pendiente) Non-precision final approach - Descent angle (Slope)				-