

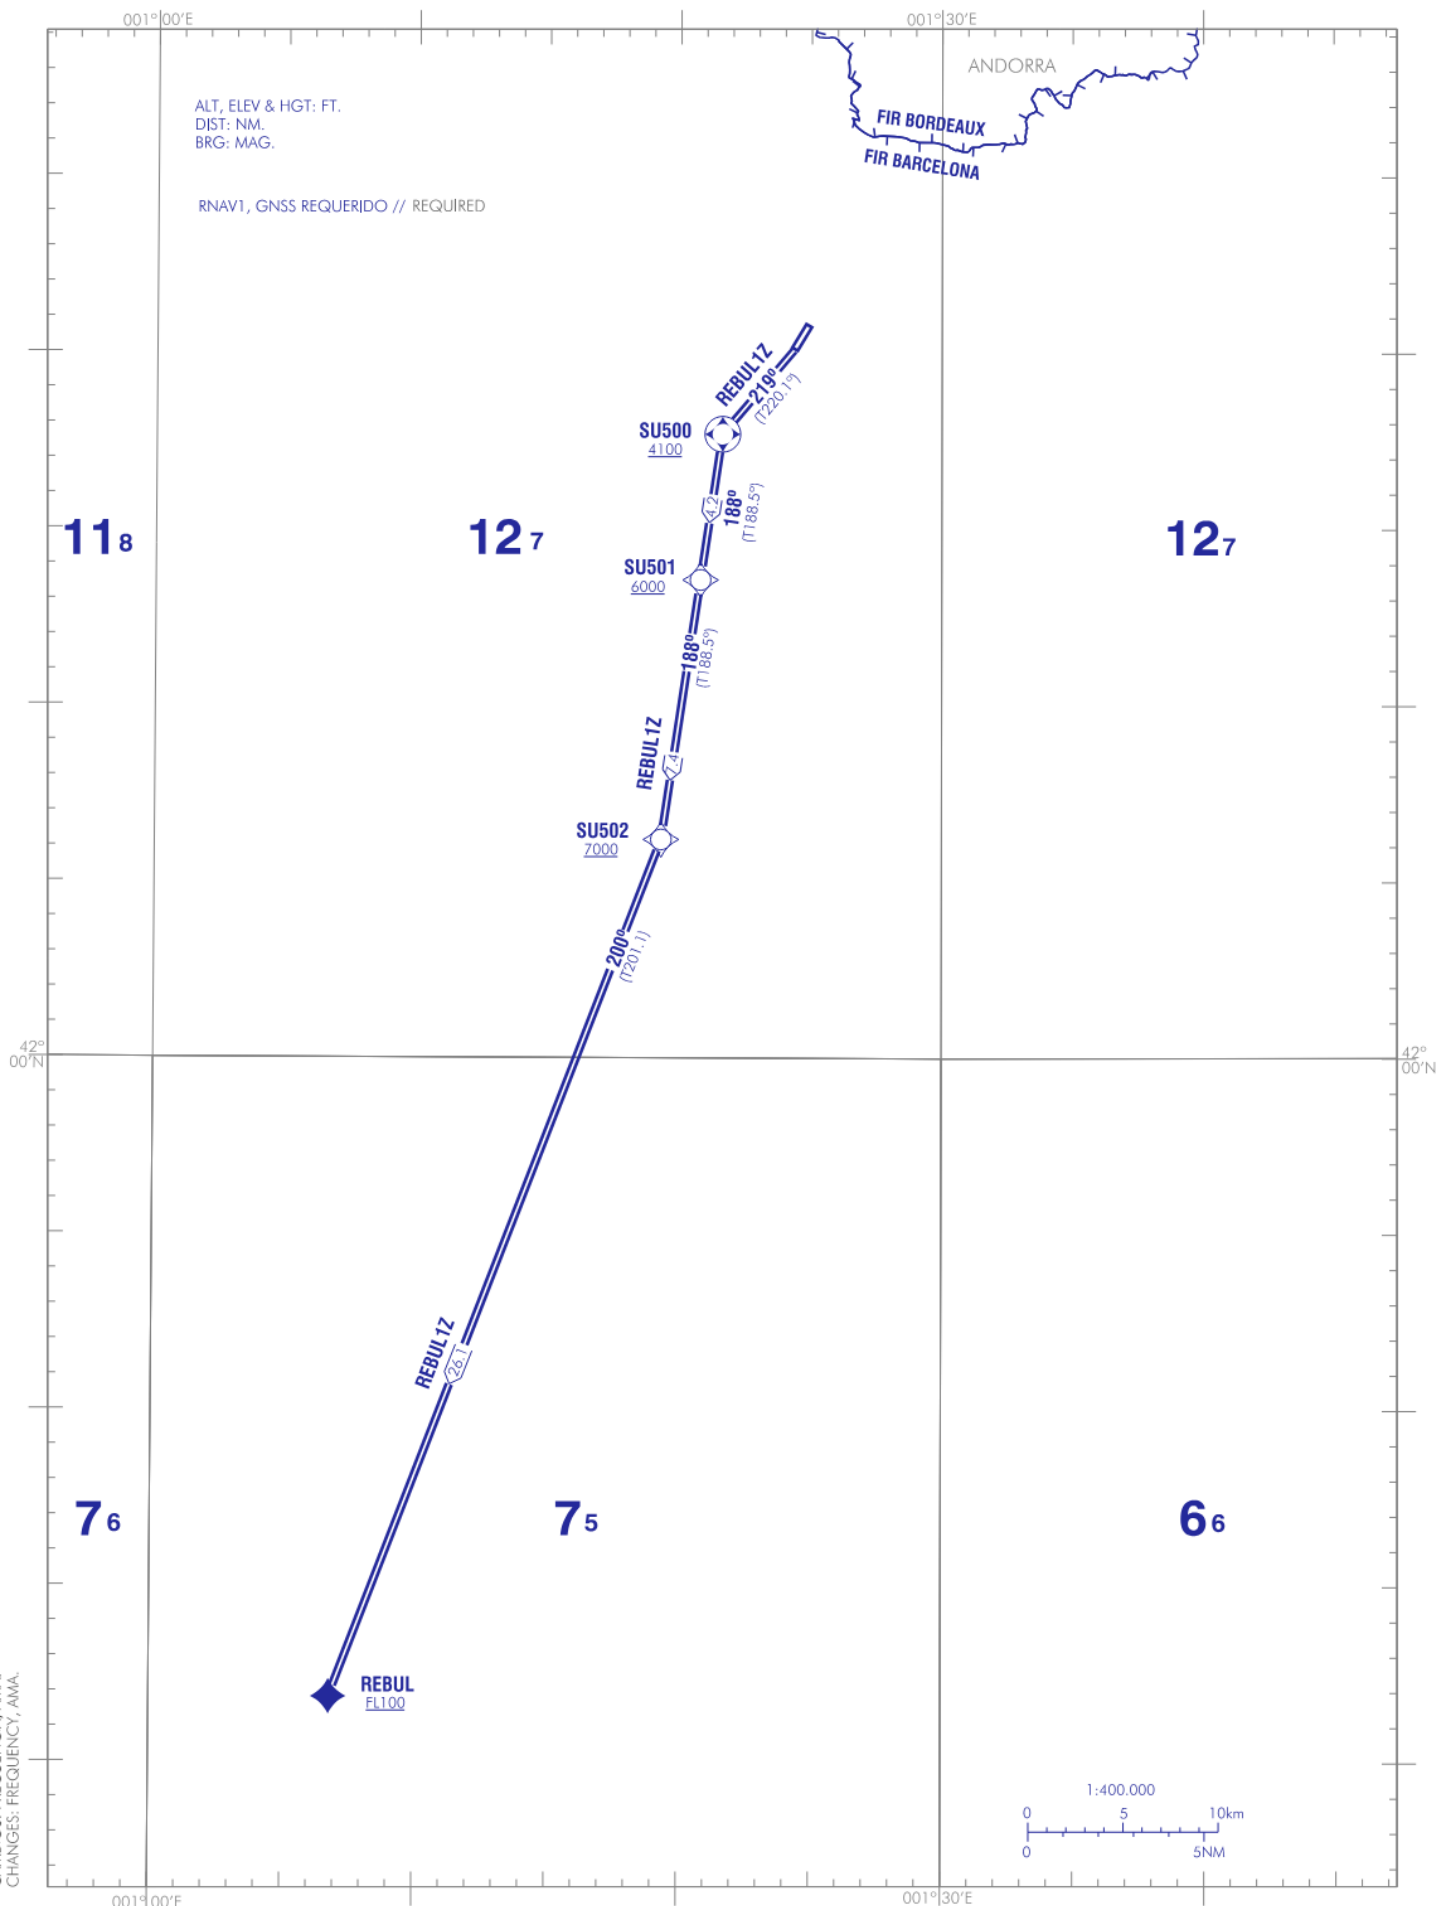
CARTA DE SALIDA NORMALIZADA
VUELO POR INSTRUMENTOS (SID) RNAV1-OACI VAR 1°E (2020)

TA 8000

AFIS 122.205 C

ALT, ELEV & HGT: FT.
DIST: NM.
BRG: MAG.

RNAV1, GNSS REQUERIDO // REQUIRED

CAMBIOS: FRECUENCIA, AWA.
CHANGES: FREQUENCY, AWA.

STANDARD INSTRUMENT DEPARTURES (SID)

RUNWAY 21

NOTES APPLICABLE TO SID:

- RNAV1 required.
- GNSS required.

WAYPOINTS COORDINATES

WAYPOINT	COORD
REBUL	414152.5N 0010648.5E
SU500	421742.6N 0012137.0E
SU501	421334.4N 0012047.2E
SU502	420612.5N 0011918.6E

PROCEDURE TABULAR DESCRIPTION

REBUL1Z RNAV												
Minimum climb gradient of 7.6 % up to SU502												
Minimum visibility required for take-off 1300 m.												
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track (°T)	°M	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	CF	SU500	Y	219 (220.1)		-0.73	-	-	+4100	-	-	RNAV1
002	TF	SU501	-	188 (188.5)		-0.73	4.2	-	+6000	-	-	RNAV1
003	TF	SU502	-	188 (188.5)		-0.73	7.4	-	+7000	-	-	RNAV1
004	TF	REBUL	-	200 (201.1)		-0.73	26.1	-	+FL100	-	-	RNAV1

SIGNIFICANT OBSTACLES

OBSTACLES	RWY	LATITUDE	LONGITUDE	HGT (ft)	ALT (ft)
Spot elevation	21	421848.5N	0012358.3E	-	3064