


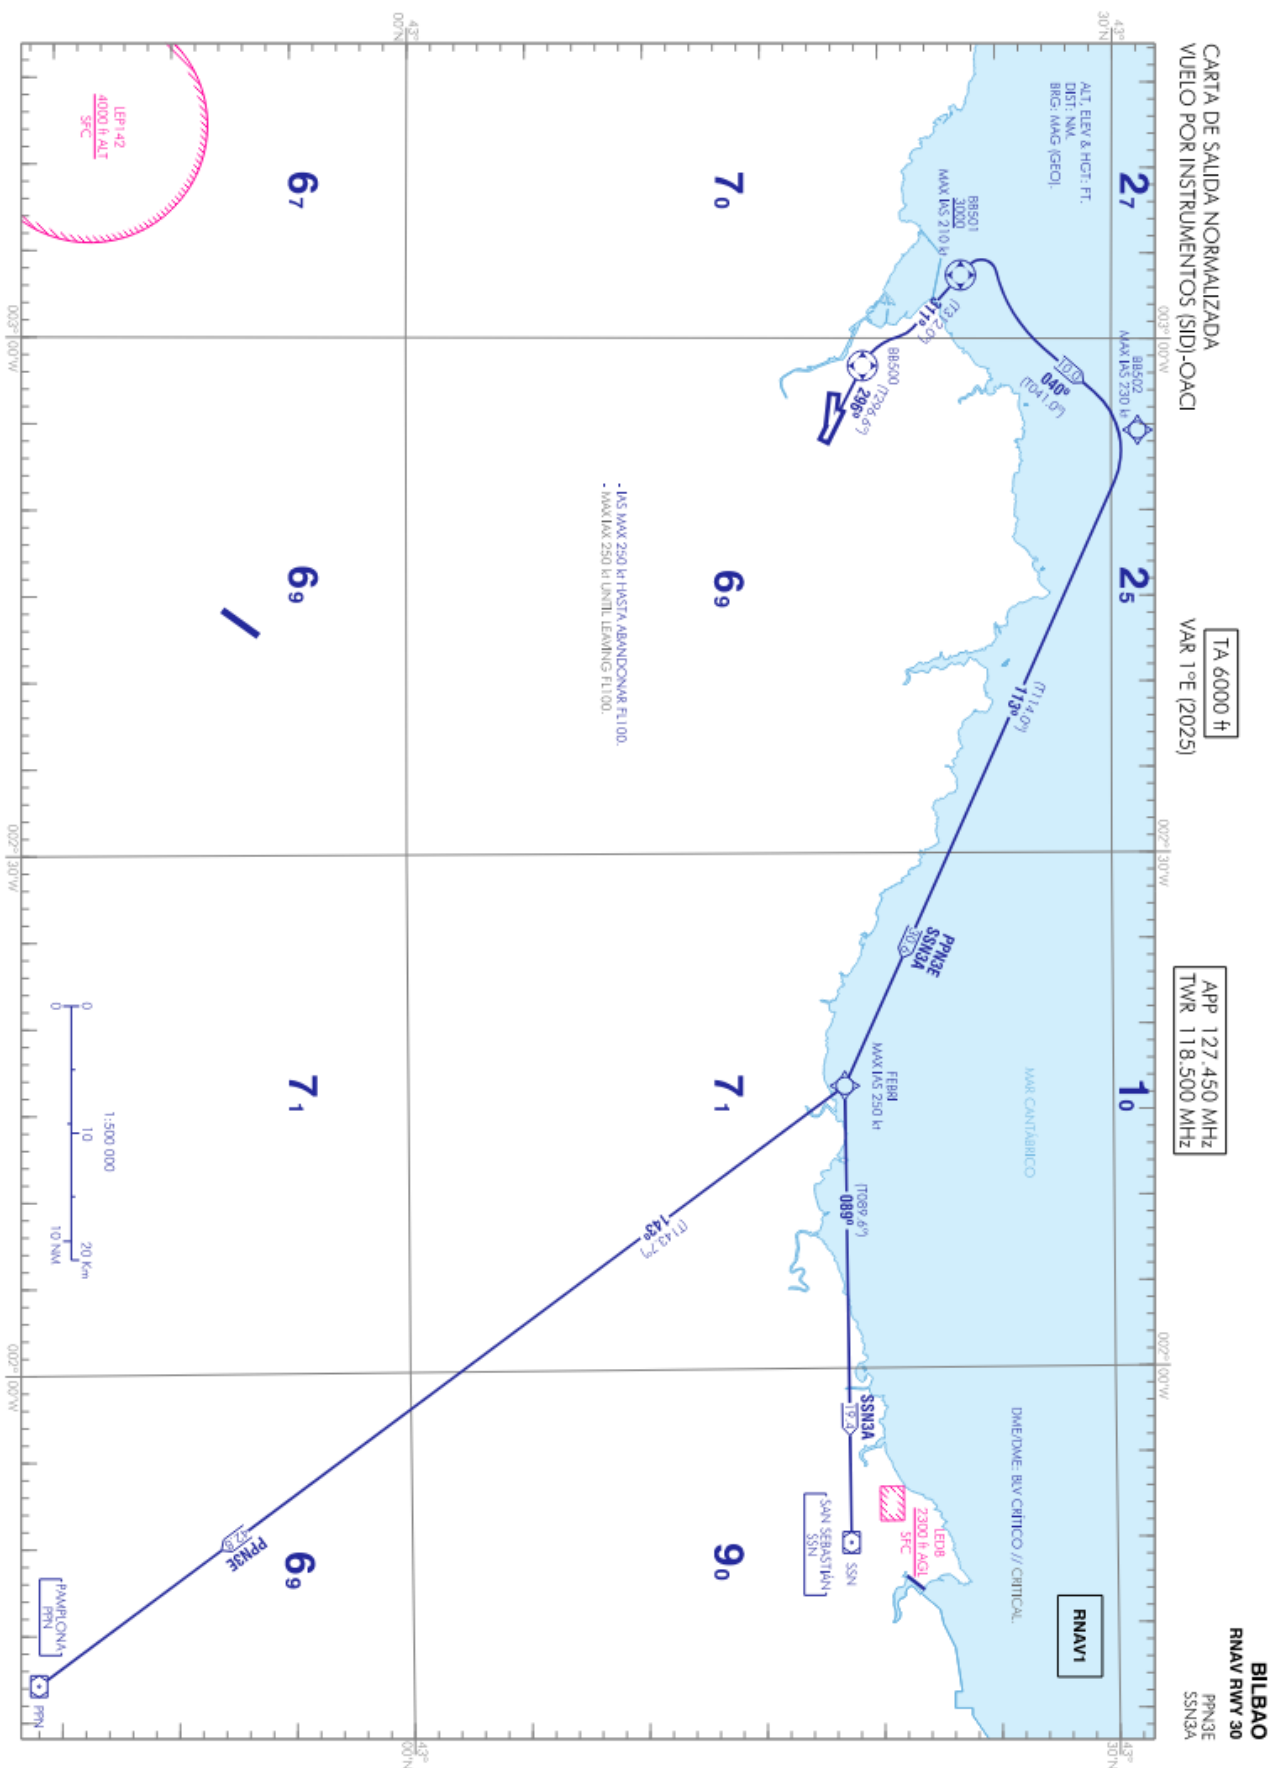

CAMBIOS: Reimpresión.

CHANGES	Reprint.
---------	----------

WAYPOINTS COORDINATES

WPT	COORD
BB500	431926.2N 025822.8W
BB501	432336.0N 0030340.8W
BB502	433108.2N 0025439.3W
FEBRI	431835.1N 0021626.2 W
PPN	424401.7N 0014206.6W
SSN	431840.7N 0014949.8W

STANDARD INSTRUMENT DEPARTURES (SID)

RUNWAY 30

- NOTES APPLICABLE TO ALL SID:
- Initial clarence: FL080, except ATC clearance.

PROCEDURE TABULAR DESCRIPTION

PPN3E											
Minimum climb gradient 7.0% up to 4000 ft.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	CF	BB500	Y	296 (296.6)	-0.7	-	-	-	-	-	RNAV1
002	CF	BB501	Y	311 (312.0)	-0.7	-	-	+3000	-210	-	RNAV1
003	TF	BB502	-	040 (041.0)	-0.7	10.0	-	-	-230	-	RNAV1
004	TF	FEBRI	-	113 (114.0)	-0.7	30.6	-	-	-250	-	RNAV1
005	TF	PPN	-	143 (143.7)	-0.7	42.8	-	-	-	-	RNAV1

SSN3A											
Minimum climb gradient 7.0% up to 4000 ft.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	CF	BB500	Y	296 (296.6)	-0.7	-	-	-	-	-	RNAV1
002	CF	BB501	Y	311 (312.0)	-0.7	-	-	+3000	-210	-	RNAV1
003	TF	BB502	-	040 (041.0)	-0.7	10.0	-	-	-230	-	RNAV1
004	TF	FEBRI	-	113 (114.0)	-0.7	30.6	-	-	-250	-	RNAV1
005	TF	SSN	-	089 (089.6)	-0.7	19.4	-	-	-	-	RNAV1

CLOSE-IN OBSTACLES

OBST	RWY	LAT	LONG	HGT (ft)	ELEV (ft)
Tree	30	431833.8N	0025539.9W	67	160

SIGNIFICANT OBSTACLES

OBST	RWY	LAT	LONG	HGT (ft)	ELEV (ft)
Tree	30	431919.3N	0025655.3W	1186	455
Tree	30	431916.3N	0025656.9W	108	388

OBST	RWY	LAT	LONG	HGT (ft)	ELEV (ft)
Terrain	30	431919.0N	0025648.3W	-	361