


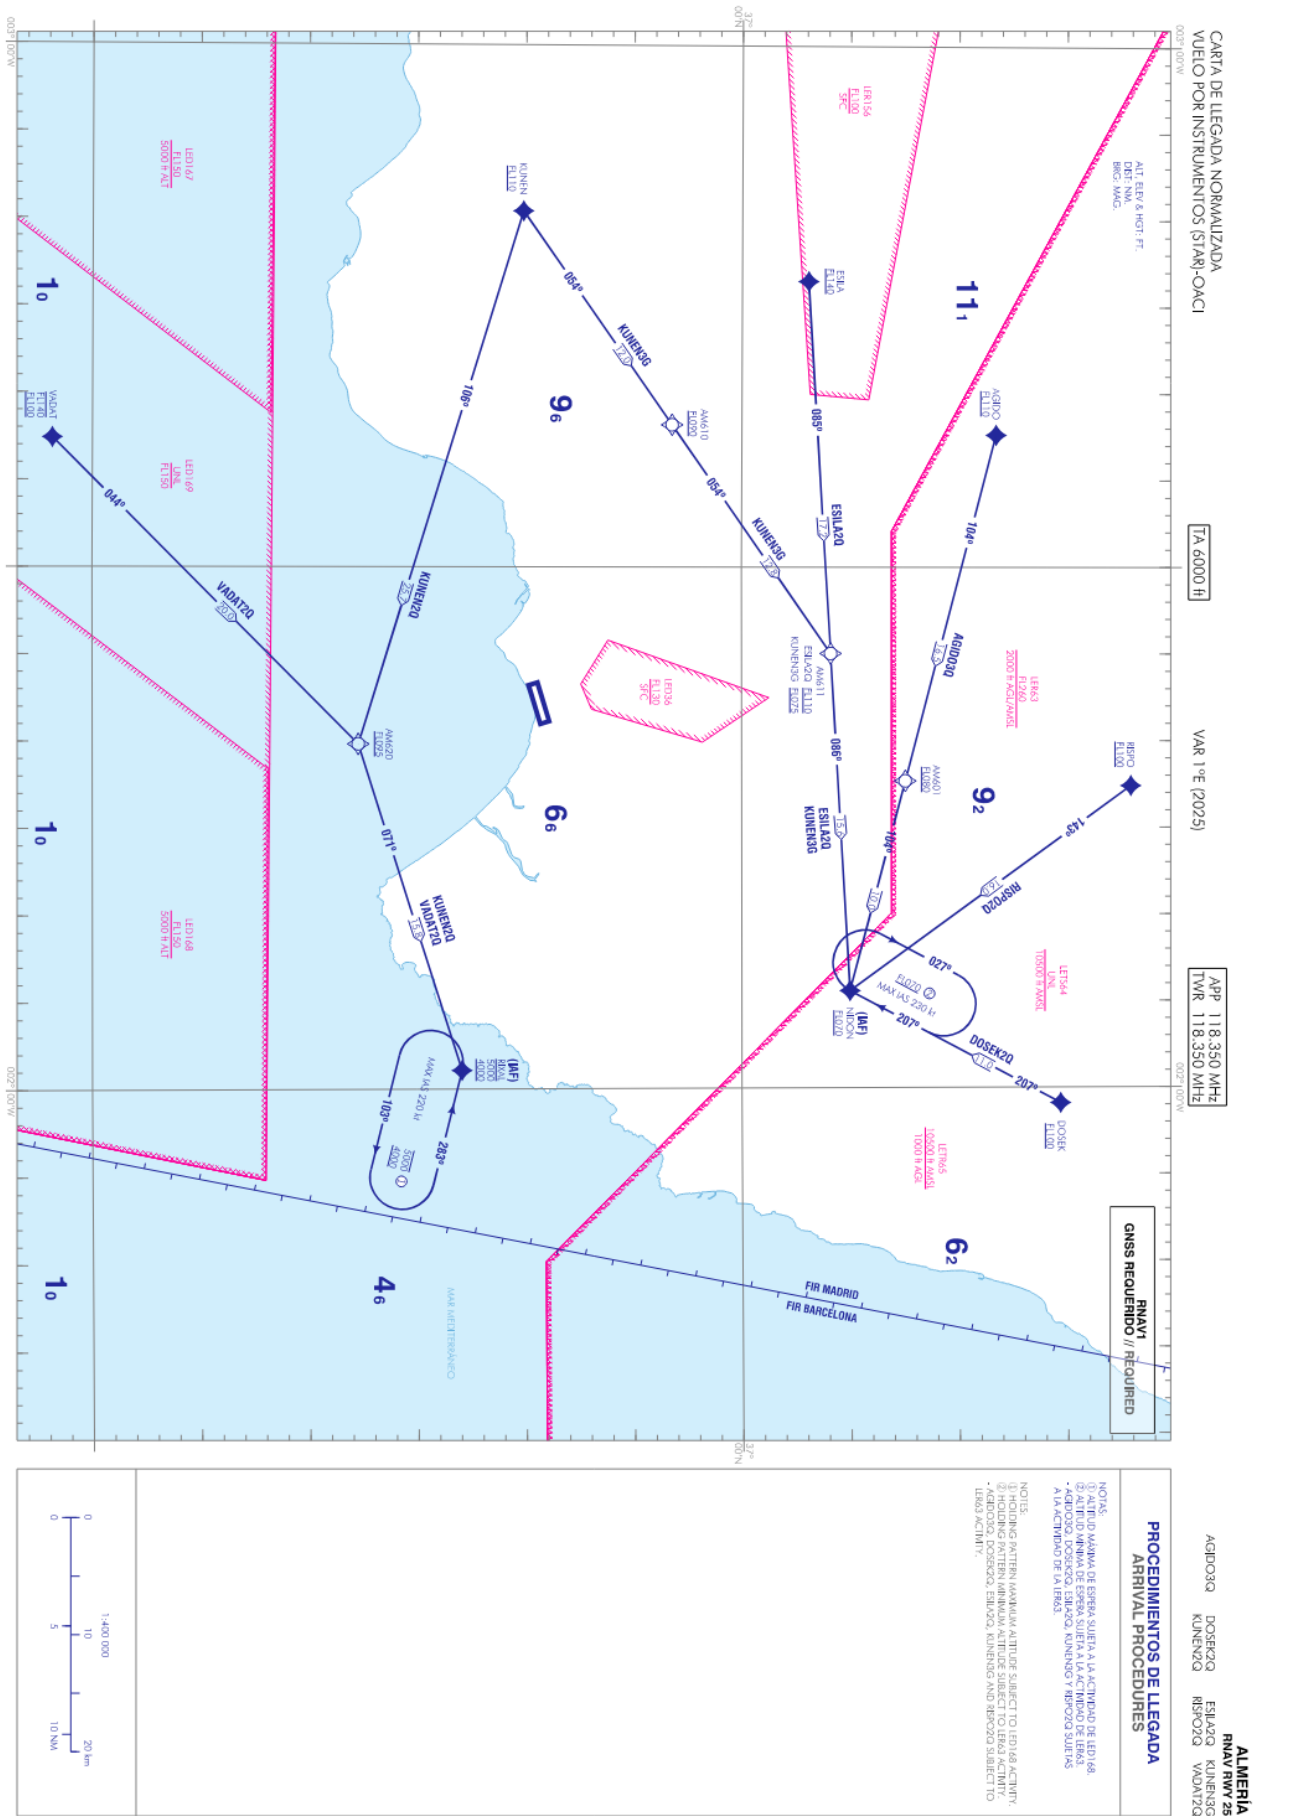

CHANGES: MAGNETIC VARIATION, HEADINGS UPLOAD, AMA, RENUMBERING.

CHANGES:

WAYPOINTS COORDINATES

WPT	COORD
AGIDO	371144.5N 0023737.0W
AM601	370734.1N 0021740.7W
AM610	365647.2N 0023810.9W
AM611	370407.4N 0022501.4W
AM620	364218.2N 0021949.7W
DOSEK	371443.3N 0015906.3W
ESILA	370305.1N 0024626.9W
KUNEN	364954.3N 0025026.7W
NIDON	370500.5N 0020535.6W
RISPO	371759.0N 0021724.1W
RIXAL	364704.1N 0020104.2W
VADAT	362809.9N 0023724.9W

STANDARD INSTRUMENT ARRIVALS (STAR)

RUNWAY 25

NOTES APPLICABLE TO ALL STAR:

- RNAV1.
- GNSS required.

PROCEDURE TABULAR DESCRIPTION

AGIDO3Q											
Subject to LER63 activity.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	AGIDO	–	–	↖-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM601	–	↖104 (104.6)	↖-1.0	16.5	–	+FL080	–	–	RNAV1
003	TF	NIDON	–	↖104 (104.8)	↖-1.0	10.0	–	+FL070	–	–	RNAV1

DOSEK2Q											
Subject to LER63 activity.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	DOSEK	–	–	↖-1.0	–	–	+FL100	–	–	RNAV1
002	TF	NIDON	–	↖207 (208.2)	↖-1.0	11.0	–	+FL070	–	–	RNAV1

ESILA2Q											
Subject to LER63 activity.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	ESILA	–	–	↖-1.0	–	–	+FL140	–	–	RNAV1
002	TF	AM611	–	↖085 (086.4)	↖-1.0	17.2	–	+FL110	–	–	RNAV1
003	TF	NIDON	–	↖086 (086.6)	↖-1.0	15.6	–	+FL070	–	–	RNAV1

KUNEN3G											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navigation specification
001	IF	KUNEN	–	–	↖-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM610	–	↖054 (↖054.0)	↖-1.0	12.0	–	+FL090	–	–	RNAV1

KUNEN3G											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
003	TF	AM611	–	054 (054.1)	-1.0	12.8	R	+FL075	–	–	RNAV1
004	TF	NIDON	–	086 (086.6)	-1.0	15.6	–	+FL070	–	–	RNAV1

KUNEN2Q											
Subject to LER63 activity.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	IF	KUNEN	–	–	-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM620	–	106 (107.0)	-1.0	25.7	–	+FL095	–	–	RNAV1
003	TF	RIXAL	–	071 (072.4)	-1.0	15.8	–	-5000 +4000	–	–	RNAV1

RISPO2Q											
Subject to LER63 activity.											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	IF	RISPO	–	–	-1.0	–	–	+FL100	–	–	RNAV1
002	TF	NIDON	–	143 (143.9)	-1.0	16.0	–	+FL070	–	–	RNAV1

VADAT2Q											
Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
001	IF	VADAT	–	–	-1.0	–	–	-FL140 +FL100	–	–	RNAV1
002	TF	AM620	–	044 (045.0)	-1.0	20.0	–	+FL095	–	–	RNAV1
003	TF	RIXAL	–	071 (072.4)	-1.0	15.8	–	-5000 +4000	–	–	RNAV1

HOLDING PATTERN

Path terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance/ Outbound time	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navegation specification
HM	NIDON	–	207 (208.0)	-1.0	1 min	R	FL070 (1)	–	-230	RNAV1
HM	RIXAL	–	283 (284.0)	-1.0	1 min	L	4000	5000 (2)	-220	RNAV1

Remarks:	
(1)	Subject to LER63 activity.
(2)	Subject to LED168 activity.