




NOTAS:
① ALTITUD SOLO PARA APROXIMACIÓN DESDE DIRXA.
NOTES:
① ALTITUDE ONLY FOR APPROACH FROM DIRXA.

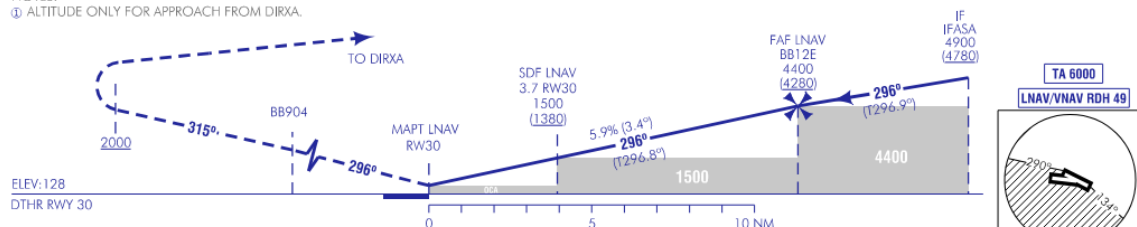


NO OFZ RWY 30
HGT REF ELEV DTHR RWY 30

OCA/H			A	B	C	D
STA	INAV	2.5%	1000 (880)			
	INAV/ VINAV	2.5%	880 (760)	890 (770)	890 (770)	900 (780)
En circuito (H) sobre Circling (H) over 136			1260 (1130)	1560 (1430)	1660 (1530)	

GS		kt	80	100	120	140	160	180
FAF-THR: 11.7 NM		min/s	8:46	7:01	5:51	5:01	4:23	3:54
FAF-MAPT:		min/s						
ROD: 5.9 %		ft/min	481	602	722	842	963	1083

ALT/HGT RW30 FNA												
13	12	11	10	9	8	7	6	5	4	3	2	1
		4150 (4030)	3790 (3660)	3430 (3300)	3070 (2940)	2710 (2580)	2350 (2220)	1900 (1860)	1630 (1500)	1270 (1140)		

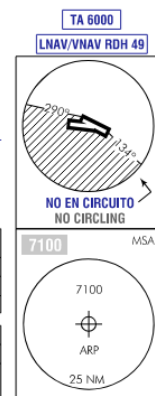

NEW CHART.

CHANGES:

AERONAUTICAL DATABASE REQUIREMENTS

INSTRUMENT APPROACH PROCEDURES

RNP Y (LPV ONLY) RWY 30

WAYPOINTS COORDINATES

WPT	COORD
BB12E (FAF)	431235.9N 0023947.2W
BB902	431639.8N 0022935.6W
BB903	431356.8N 0022216.4W
BB904	431912.5N 0025745.2W
DIRXA (IAF)	430742.5N 0022636.8W
RW30 (MAPt LNAV)	431751.7N 0025404.9W
IFASA (IAF/IF)	431026.6N 0023358.3W
Non-precision final approach (LNAV) - Slope (Descent angle)	5.94 % (3.40°)
APV Baro final approach (LNAV/VNAV) - Slope (Descent angle)	5.94 % (3.40°)

PROCEDURE TABULAR DESCRIPTION

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
DIRXA (IAF)											
001	IF	DIRXA	-	-	-0.7	-	-	+6000	-	-	RNP APCH
002	TF	IFASA	-	296 (297.0)	-0.7	6.0	-	+4900	-	-	RNP APCH
003	TF	BB12E	-	296 (296.9)	-0.7	4.8	-	+4400	-	-	RNP APCH
004	TF	RW30	Y	296 (296.8)	-0.7	11.7	-	+178	-	-3.4 / 49	RNP APCH
005	CF	BB904	Y	296 (296.7)	-0.7	-	-	-	-	-	RNP APCH
006	CA	-	-	315 (315.7)	-0.7	-	-	+2000	-	-	RNP APCH
007	DF	DIRXA	-	-	-0.7	-	R	+6000	-	-	RNP APCH

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
IFASA (IAF)											
001	IF	IFASA	-	-	-0.7	-	-	+6000	-	-	RNP APCH
002	TF	BB902	-	027 (027.2)	-0.7	7.0	-	-	-	-	RNP APCH
003	TF	BB903	-	116 (116.9)	-0.7	6.0	-	-	-	-	RNP APCH
004	TF	DIRXA	-	206 (207.0)	-0.7	7.0	-	-	-	-	RNP APCH
005	TF	IFASA	-	296 (297.0)	-0.7	6.0	-	+4900	-	-	RNP APCH
006	TF	BB12E	-	296 (296.9)	-0.7	4.8	-	+4400	-	-	RNP APCH
007	TF	RW30	Y	296 (296.8)	-0.7	11.7	-	+178	-	-3.4 / 49	RNP APCH
008	CF	BB904	Y	296 (296.7)	-0.7	-	-	-	-	-	RNP APCH
009	CA	-	-	315 (315.7)	-0.7	-	-	+2000	-	-	RNP APCH
010	DF	DIRXA	-	-	-0.7	-	R	+6000	-	-	RNP APCH

HOLDING PATTERN

Path terminator	Waypoint identifier	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navigation specification
HM	DIRXA	269 (270.0)	-0.7	4.7	R	6000	-	-	RNAV 1
HM	IFASA	295 (295.9)	-0.7	4.7	R	6000	-	-	RNAV 1