


ELEV AD
83 ft
VAR 3°W (2025)


APP 129.300 MHz
TWR 118.475 MHz
GMC 121.700 MHz
ATIS 118.650 MHz

FUERTEVENTURA
ILS Z
RWY 19

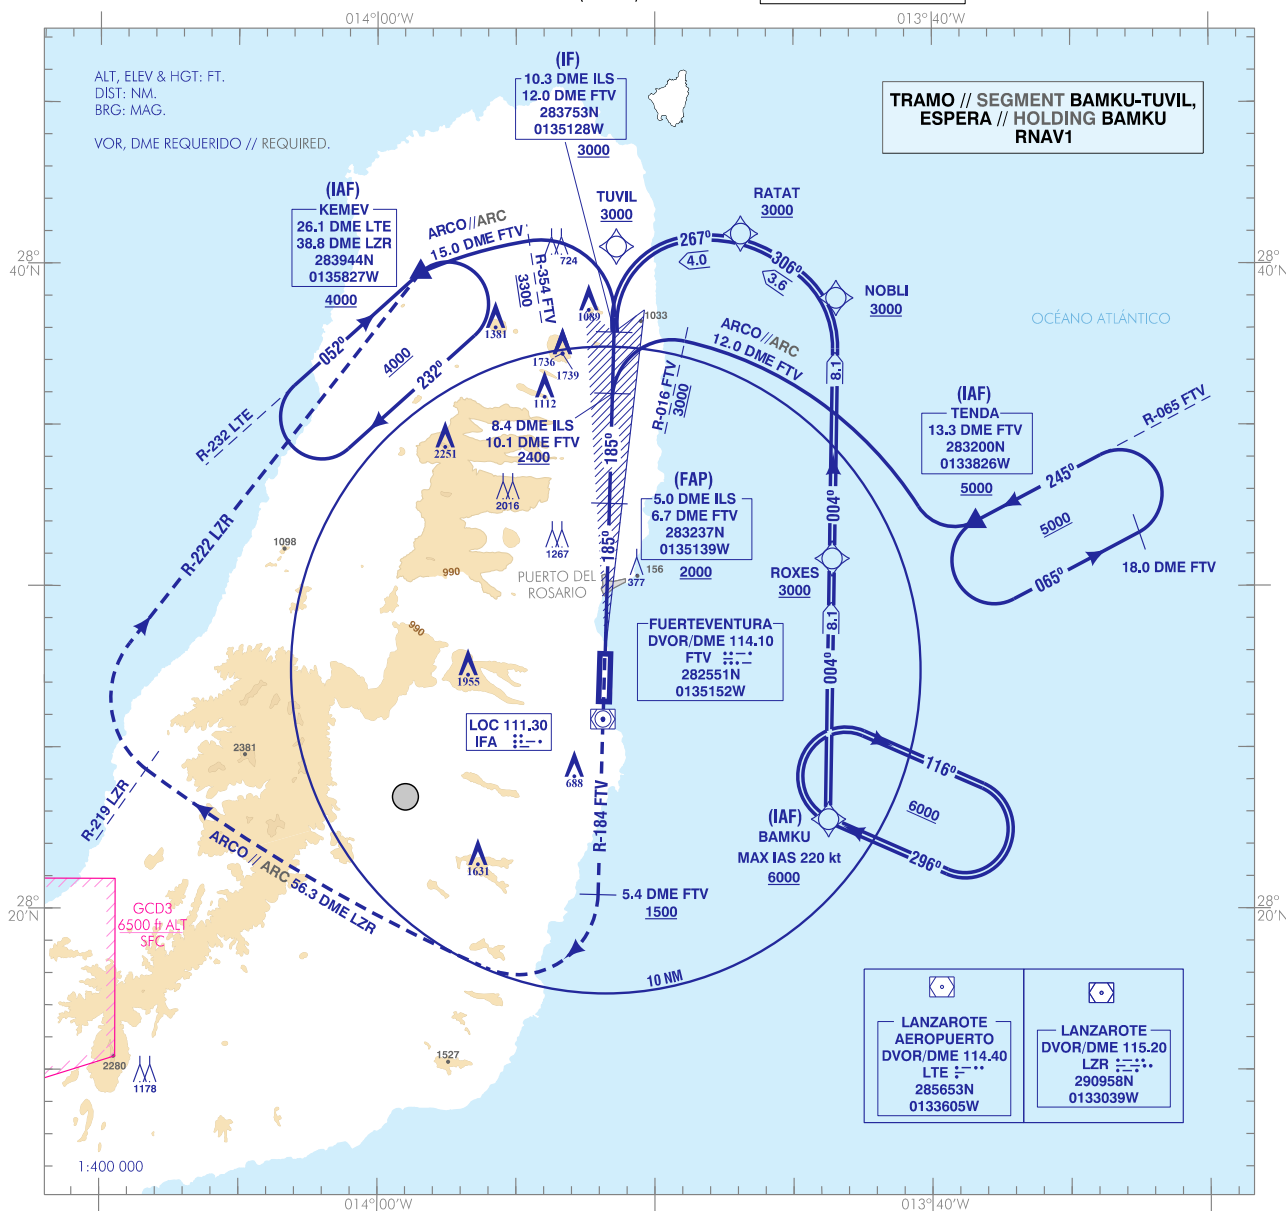

FRUSTRADA: SUBIR EN RUMBO DE PISTA DIRECTO AL DVOR/DME FTV. SEGUIR R-184 FTV HASTA ALCANZAR 5.4 DME FTV A 1500 O SUPERIOR. VIRAR A LA DERECHA PARA INTERCEPTAR Y SEGUIR ARCO 56.3 DME LZR HASTA R-219 LZR. VIRAR A LA DERECHA PARA SEGUIR R-222 LZR DIRECTO A KEMEV PARA INTEGRARSE A LA ESPERA A 4000.

MISSED APCH: CLIMB IN RUNWAY HEADING TO DVOR/DME FTV. FOLLOW R-184 FTV TO 5.4 DME FTV UP TO 1500 OR ABOVE. TURN RIGHT TO INTERCEPT AND FOLLOW 56.3 DME LZR ARC UP TO R-219 LZR. TURN RIGHT TO FOLLOW R-222 LZR DIRECT TO KEMEV TO JOIN THE HOLDING AT 4000.

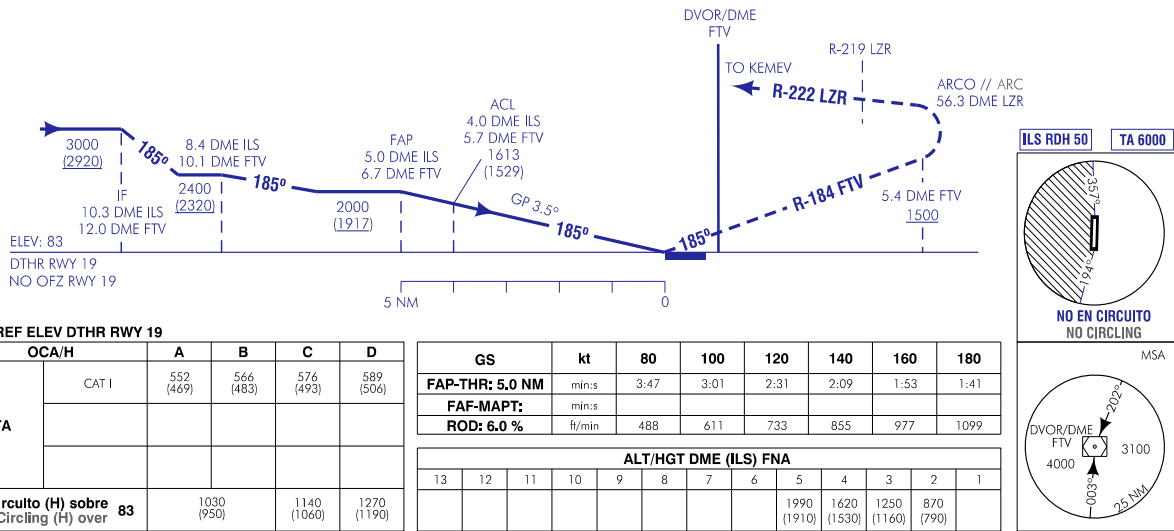

CHANGES:

AERONAUTICAL DATABASE REQUIREMENTS

INSTRUMENT APPROACH PROCEDURES

ILSY RWY 19

POINT	LAT	LONG	TRUE BEARING	DME DISTANCE (NM)
TENDA (IAF)	283200.0N	0133826.4W	052.85° (FV)	14.69 DME FUE
KEMEV (IAF)	283943.6N	0135826.6W	341.21° (FV)	17.68 DME FUE
IF	283753.1N	0135128.2W	001.67° (LOC IFA)	10.30 DME ILS
FAP	283236.8N	0135138.7W	001.67° (LOC IFA)	5.04 DME ILS
Precision final approach - Slope (Descent angle)				6.03% (3.45°)

WAYPOINTS COORDINATES

WPT	COORD
BAMKU (IAF)	282246.3N 0134344.6W
NOBLI	283856.0N 0134327.6W
RATAT	284055.7N 0134654.1W
ROXES	283051.2N 0134336.3W
TUVIL	284031.7N 0135123.0W

NOTES APPLICABLE TO ALL APPROACHES:

- Speed control:
- a. Unless otherwise instructed by ATC, cross:
- IAS 220 kt over IAF BAMKU, KEMEV, TENDA;
 - IAS 190 kt at 9.0 DME ILS;
 - IAS 160 kt at 4.0 DME ILS.
- b. If unable to comply, advise ATC on first contact.

PROCEDURE TABULAR DESCRIPTION

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
BAMKU (IAF)											
001	IF	BAMKU	–	–	+2.9	–	–	+6000	-220	–	RNAV1
002	TF	ROXES	–	004 (000.9)	+2.9	8.1	–	+3000	–	–	RNAV1
003	TF	NOBLI	–	004 (000.9)	+2.9	8.1	–	+3000	–	–	RNAV1
004	TF	RATAT	–	306 (303.3)	+2.9	3.6	–	+3000	–	–	RNAV1
005	TF	TUVIL	–	267 (264.2)	+2.9	4.0	–	+3000	–	–	RNAV1

HOLDING PATTERN

Path terminator	Waypoint identifier	Course/Track °M (°T)	Magnetic variation	Distance/ Outbound time	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navigation specification
HM	BAMKU	296 (293.2)	+2.9	–	R	6000	–	-220	RNAV1