

CARTA DE LLEGADA NORMALIZADA
VUELO POR INSTRUMENTOS (STAR)-OACI

TA 6000 ft

VAR 1°E (2025)


APP 118.350 MHz
TWR 118.350 MHz

ALMERÍA
RNAV RWY 07

AGIDO2R DOSEK2R ESILA3R
KUNEN2R RISPO2R VADAT2R


CHANGES: MINIMUM ALTITUDE ESILA, MOCA

CHANGES:

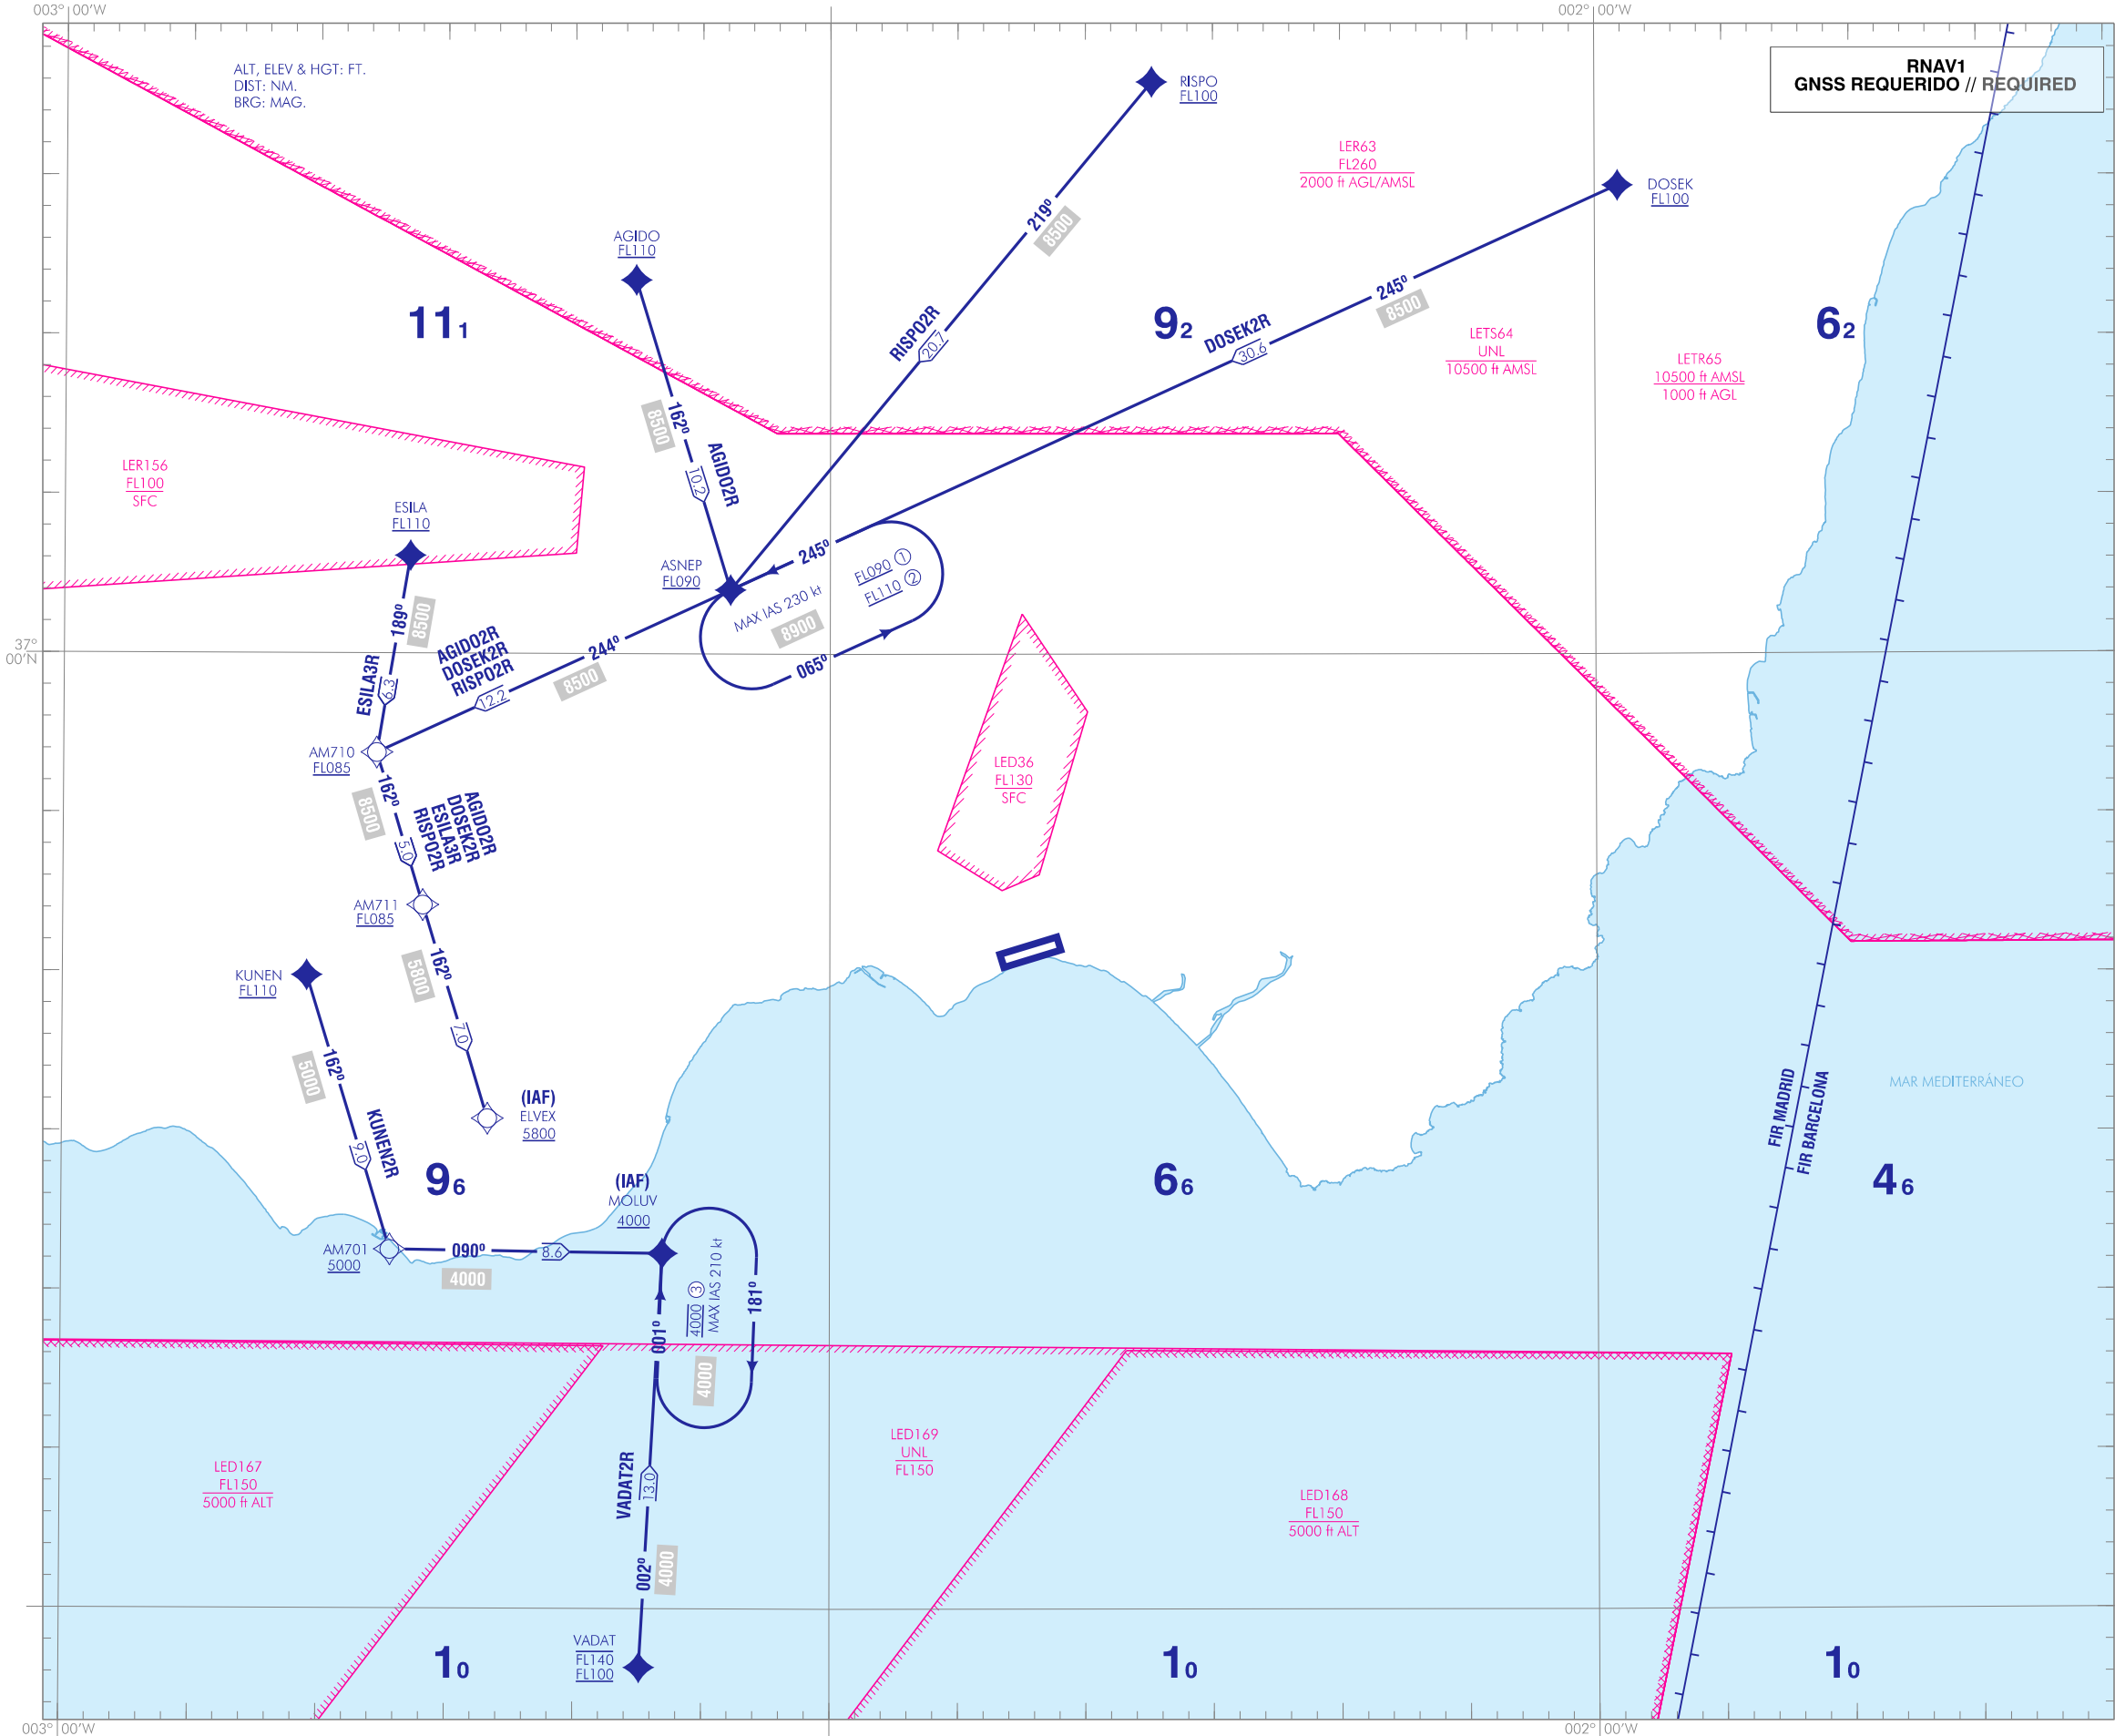

NOTAS:
① ALTITUD MÍNIMA DE ESPERA SUJETA A LA ACTIVIDAD DE LER156 Y LED36.
② ALTITUD MÍNIMA DE ESPERA SUJETA A LA ACTIVIDAD DE LED36.
③ ALTITUD MÁXIMA DE ESPERA SUJETO A LA ACTIVIDAD DE LED167.
- AGIDO2R, DOSEK2R, RISPO2R SUJETAS A LA ACTIVIDAD DE LA LER63.
- AGIDO2R: IAS MAX 270 kt EN AGIDO.
- ESILA3R: IAS MAX 250 kt EN ESILA.
- CARTA SÓLO UTILIZABLE PARA AERONAVES QUE VAYAN A EFECTUAR APROXIMACIONES RNP A RWY 07.

NOTES:
① HOLDING PATTERN MINIMUM ALTITUDE SUBJECT TO LER156 & LED36 ACTIVITY.
② HOLDING PATTERN MINIMUM ALTITUDE SUBJECT TO LED36 ACTIVITY.
③ HOLDING PATTERN MAXIMUM ALTITUDE SUBJECT TO LED167 ACTIVITY.
- AGIDO2R, DOSEK2R, RISPO2R SUBJECT TO LER63 ACTIVITY.
- AGIDO2R: MAX IAS 270 kt ON AGIDO.
- ESILA3R: MAX IAS 250 kt ON ESILA.
- CHART TO BE USED ONLY BY ACFT TO PERFORM RNP APPROACH TO RWY 07.



WAYPOINTS COORDINATES

WPT	COORD
AGIDO	371144.5N 0023737.0W
AM701	364117.2N 0024710.4W
AM710	365653.6N 0024744.7W
AM711	365206.4N 0024555.3W
ASNEP	370200.8N 0023354.5W
DOSEK	371443.3N 0015906.3W
ELVEX	364524.2N 0024322.2W
ESILA	370305.1N 0024626.9W
KUNEN	364954.3N 0025026.7W
MOLUV	364110.3N 0023631.9W
RISPO	371759.0N 0021724.1W
VADAT	362809.9N 0023724.9W

STANDARD INSTRUMENT ARRIVALS (STAR)

RUNWAY 07

NOTES APPLICABLE TO ALL STAR:

- RNAV1.
- GNSS required.

PROCEDURE TABULAR DESCRIPTION

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
AGIDO2R											
Holding pattern at ASNEP, subject to LER63 activity.											
001	IF	AGIDO	–	–	-1.0	–	–	+FL110	-270	–	RNAV1
002	TF	ASNEP	–	162 (163.0)	-1.0	10.2	–	+FL090	–	–	RNAV1
003	TF	AM710	–	244 (245.3)	-1.0	12.2	–	+FL085	–	–	RNAV1
004	TF	AM711	–	162 (163.0)	-1.0	5.0	–	+FL085	–	–	RNAV1
005	TF	ELVEX	–	162 (163.0)	-1.0	7.0	–	+5800	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
DOSEK2R											
Holding pattern at ASNEP, subject to LER63 activity.											
001	IF	DOSEK	–	–	-1.0	–	–	+FL100	–	–	RNAV1
002	TF	ASNEP	–	245 (245.7)	-1.0	30.6	–	+FL090	–	–	RNAV1
003	TF	AM710	–	244 (245.3)	-1.0	12.2	–	+FL085	–	–	RNAV1
004	TF	AM711	–	162 (163.0)	-1.0	5.0	–	+FL085	–	–	RNAV1
005	TF	ELVEX	–	162 (163.0)	-1.0	7.0	–	+5800	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
ESILA3-Q											

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
Subject to LER63 activity.											
001	IF	ESILA	–	–	-1.0	–	–	+FL 110	-250	–	RNAV1
002	TF	AM710	–	189 (189.5)	-1.0	6.3	–	+FL085	–	–	RNAV1
003	TF	AM711	–	162 (163.0)	-1.0	5.0	–	+FL085	–	–	RNAV1
004	TF	ELVEX	–	162 (163.0)	-1.0	7.0	–	+5800	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
KUNEN2R											
001	IF	KUNEN	–	–	-1.0	–	–	+FL 110	–	–	RNAV1
002	TF	AM701	–	162 (163.0)	-1.0	9.0	–	+5000	–	–	RNAV1
003	TF	MOLUV	–	090 (090.7)	-1.0	8.6	–	+4000	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
RISPO2R											
Holding pattern at ASNEP, subject to LER63 activity.											
001	IF	RISPO	–	–	-1.0	–	–	+FL 100	–	–	RNAV1
002	TF	ASNEP	–	219 (219.7)	-1.0	20.7	–	+FL090	–	–	RNAV1
003	TF	AM710	–	244 (245.3)	-1.0	12.2	–	+FL085	–	–	RNAV1
004	TF	AM711	–	162 (163.0)	-1.0	5.0	–	+FL085	–	–	RNAV1
005	TF	ELVEX	–	162 (163.0)	-1.0	7.0	–	+5800	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
VADAT2R											
001	IF	VADAT	–	–	-1.0	–	–	-FL140 +FL100	–	–	RNAV1
002	TF	MOLUV	–	002 (003.1)	-1.0	13.0	–	+4000	–	–	RNAV1

HOLDING PATTERN

Path terminator	Waypoint identifier	Course/Track °M (°T)	Magnetic variation	Distance/ Outbound time	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navegation specification
HM	ASNEP	245 (246.0)	-1.0	1 min	L	FL090 (1) FL110 (2)	–	-230	RNAV1
HM	MOLUV	001 (002.3)	-1.0	1 min	R	4000	4000 (3)	-210	RNAV1

Remarks:	
(1)	SUBJECT TO LER156 AND LED36 ACTIVITY.
(2)	SUBJECT TO LED36 ACTIVITY.
(3)	SUBJECT TO LED167 ACTIVITY.