


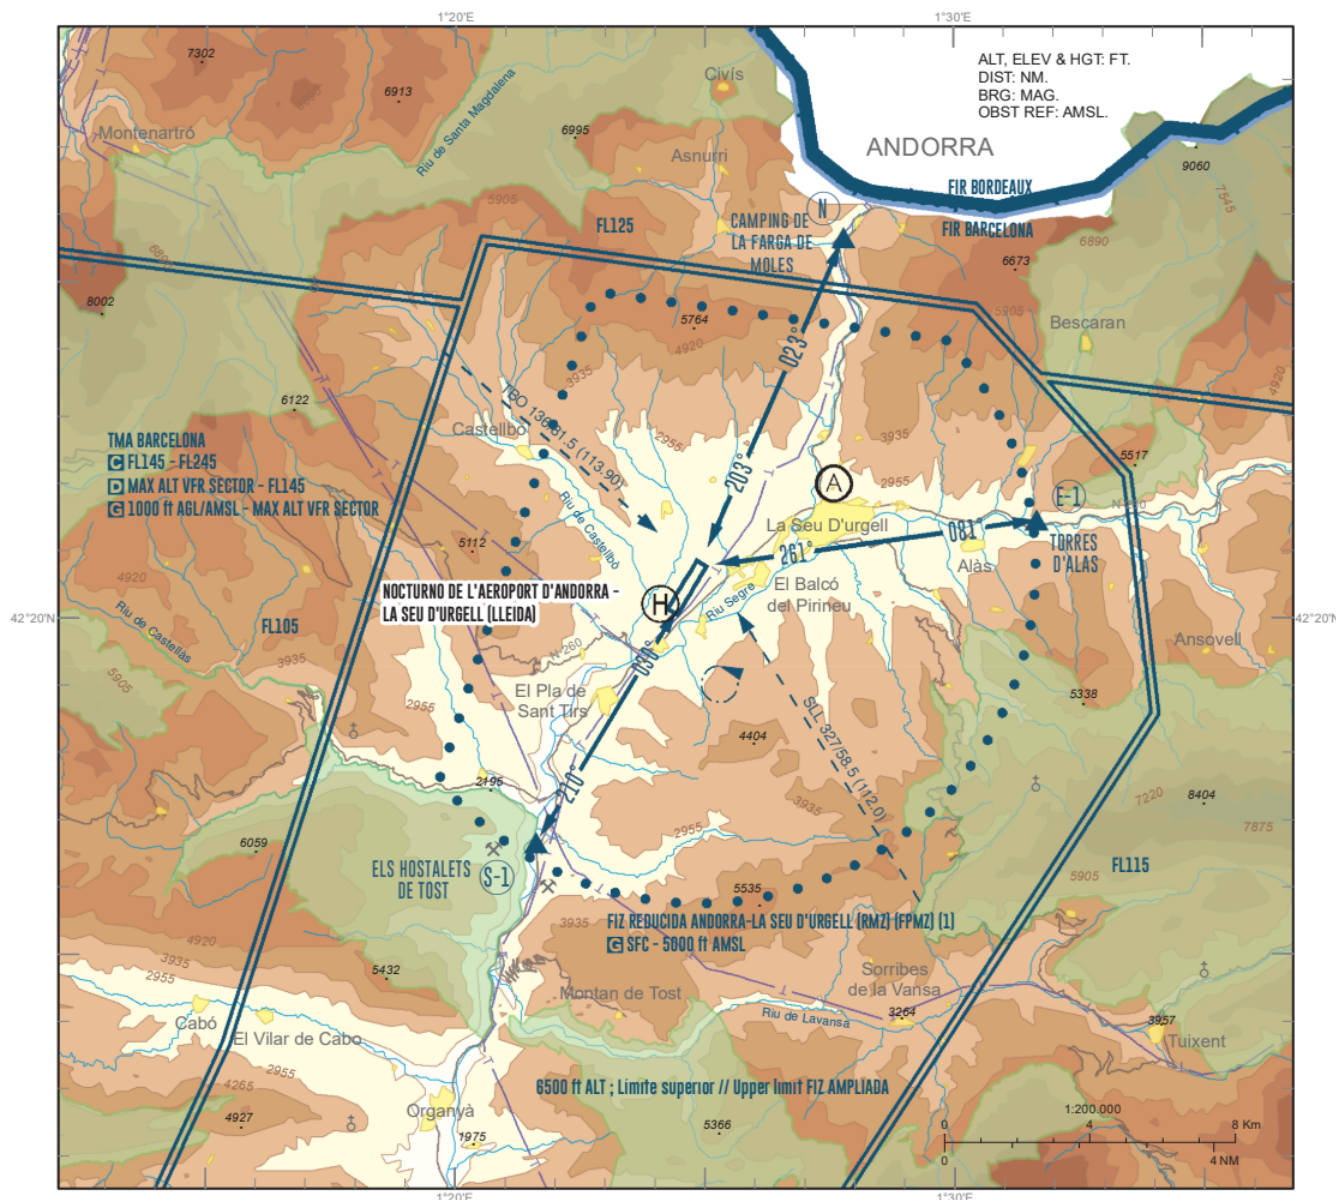

NOTAS

(1) Zona obligatoria de presentación de plan de vuelo en HR AFIS.

LLEGADAS

Tráfico VFR con destino Andorra-La Seu d'Urgell comunicará con la dependencia AFIS y notificará sus intenciones antes de alcanzar los puntos de notificación N (Camping de la Farga de Moles), E-1 (Torres d'Alas) o S-1 (Els Hostalets de Tost), evitando el sobrevuelo de núcleos urbanos e integrándose al circuito de tránsito de aeródromo.

SALIDAS

Tráfico VFR que desee abandonar la FIZ REDUCIDA, notificará sus intenciones a la dependencia AFIS.

FALLO DE COMUNICACIONES

Las aeronaves que experimenten fallo de comunicaciones en la llegada, entrarán en la FIZ desde el punto de notificación E-1 (Torres d'Alas) a 500 ft AGL y se situarán al Este de la pista, a la vista de la torre, a la espera de señales luminosas. Podrán contactar con La Seu Información en el TEL: +34-973 355 926.

OBSERVACIONES

- PAPI (MEHT): RWY 03 (2): 3.05° (25 ft) (3) RWY 03: 4.4° (29 ft) (4) RWY 21: 2.99° (32 ft) (3) (5)
- (2) Posible información no esperada en PAPI RWY 03 en horario de uso restringido, 10 minutos antes de la activación del horario de uso público.
- (3) Para notificación de incidencias o solicitud de mayor intensidad, contactar con la Dependencia AFIS en Andorra-La Seu d'Urgell AD, 122.205 C, TEL: +34-973 355 926.
- (4) Uso exclusivo PAPI 4.4° para aproximación instrumental RNP APCH. Aproximación solitaria. Con FIZ ampliada activada sin operaciones instrumentales se activará PAPI 3.05°
- (5) Sólo utilizable entre 2 NM y el umbral.
- Observar la manga de viento para definir la pista en servicio.
- Evitar el sobrevuelo de poblaciones siempre que sea posible.

NOTES

(1) Flight plan submission mandatory zone during AFIS HR.

ARRIVALS

VFR traffic with destination Andorra -La Seu d'Urgell shall communicate with the AFIS unit and notify its intentions before reaching the reporting points N (Camping de la Farga de Moles), E-1 (Torres d'Alas) or S-1 (Els Hostalets de Tost), avoiding overflying urban areas and joining the aerodrome traffic circuit.

DEPARTURES

VFR traffic wishing to exit the FIZ REDUCIDA, shall notify its intentions to the AFIS unit.

COMMUNICATIONS FAILURE

Aircraft experiencing communications failure during arrival shall enter the FIZ via reporting point E-1 (Torres d'Alas) at 500 ft AGL and shall remain to the East of the runway, in sight of the tower, and await light signals. They can contact La Seu Information on TEL: +34-973 355 926.

REMARKS

- PAPI (MEHT): RWY 03 (2): 3.05° (25 ft) (3) RWY 03: 4.4° (29 ft) (4) RWY 21: 2.99° (32 ft) (3) (5)
- (2) Possible unexpected information on PAPI RWY 03 during restricted use hours, 10 minutes before the activation of public use hours.
- (3) To notify incidents or request a higher intensity, contact the AFIS Unit at Andorra-La Seu d'Urgell AD, 122.205 C, TEL: +34-973 355 926.
- (4) Exclusive use of PAPI 4.4° for instrument RNP approach. Single approach. When the extended FIZ is activated without instrument operations, PAPI 3.05° will be activated.
- (5) Only usable between 2 NM and the threshold.
- Observe the windsock to define the runway in service.
- Avoid overflying the settlement whenever possible.

- Caution: Possible paragliding activity to the South of the field and model flying (Club Sedis) to the North-East.
- Caution: Wind shear on final.
- Caution: Bird risk on the surroundings of the airport, especially on short final RWY 21.
- Radio required to operate at the AD.
- Frequencies:

Service	Call Sign	FREQ	HR	Remarks
AFIS	La Seu Information	122.205 C	H24 (6)	-
AFIS	La Seu Information	131.605 C	HR ATS (7)	BACK-UP
AFIS	La Seu Information	121.500 MHz	HR ATS	EMERG

- (6) Outside ATS operation hours, this frequency shall be used for A/A communications.
- (7) Outside ATS operation hours, this frequency shall be used for G/A communications.
- For information, the geographical coordinates of VFR reporting points are included:
- N: 422540N 0012747E (SLL R-331 / 62 NM).
- E-1: 422128N 0013139E (SLL R-332 / 57 NM).
- S-1: 421640N 0012137E (SLL R-323 / 57 NM).