


CARTA DE APROXIMACIÓN
POR INSTRUMENTOS-OACI

ELEV AD
83 ft
VAR 3°W (2025)

APP 129.300 MHz
TWR 118.475 MHz
GMC 121.700 MHz
ATIS 118.650 MHz


FUERTEVENTURA
RNP Y
RWY 01

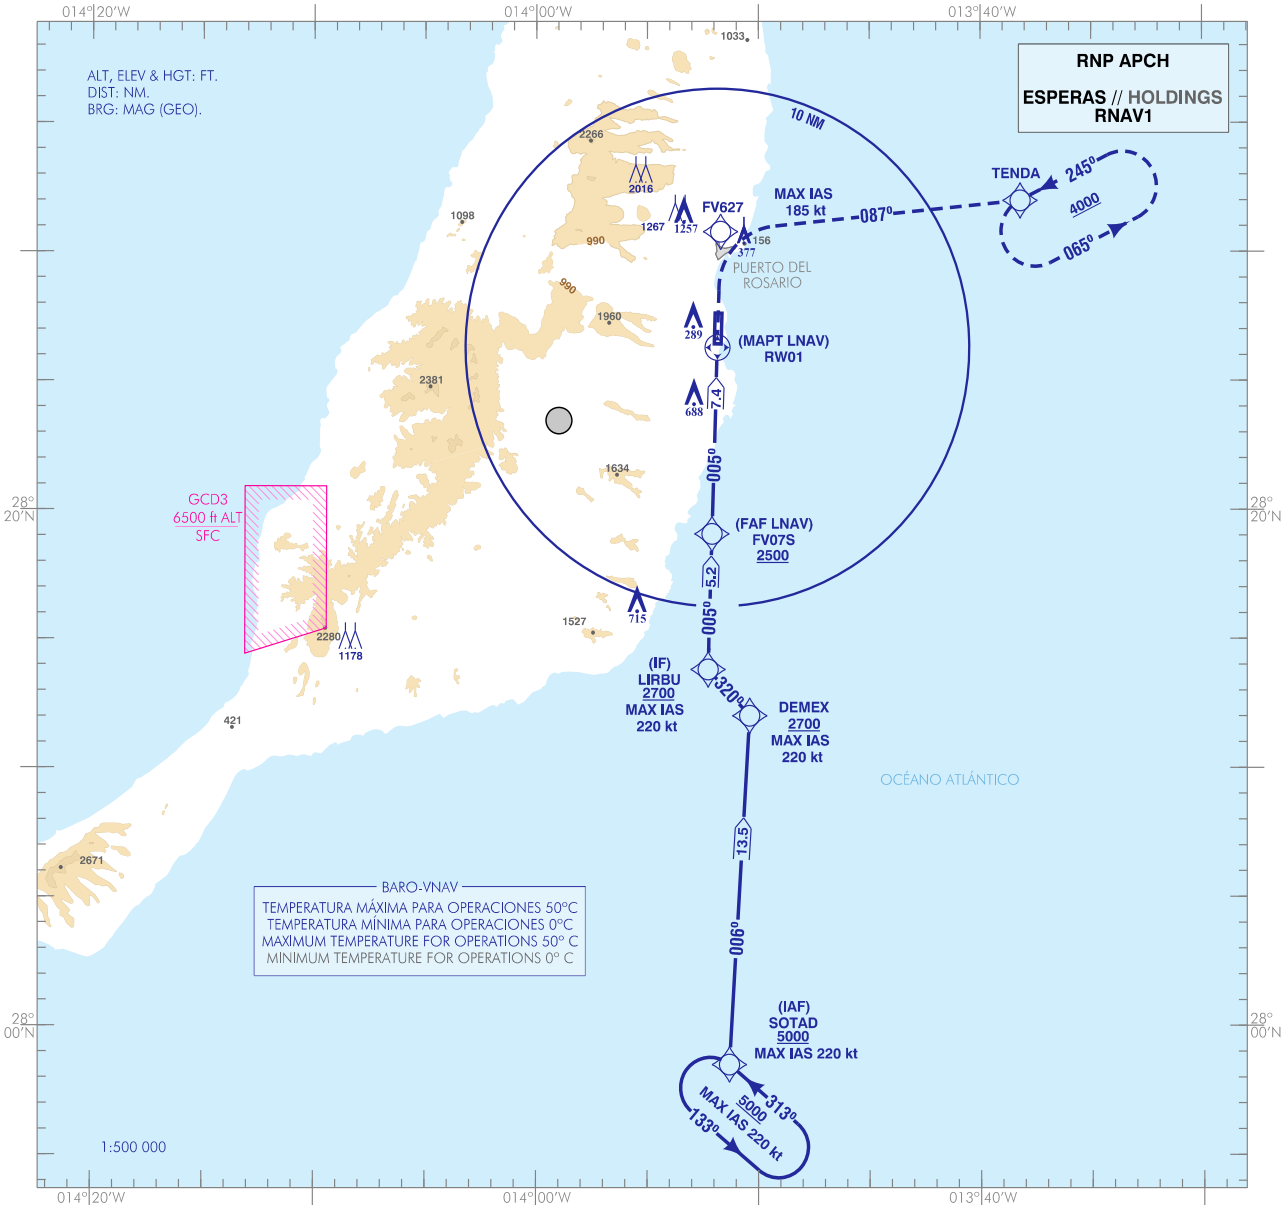

FRUSTRADA: SUBIR DIRECTO A FV627. VIRAR A LA DERECHA A TENDA (IAS MAX 185 kt) PARA INCORPORARSE A LA ESPERA A 4000.
MISSED APCH: CLIMB DIRECT TO FV627. TURN RIGHT TO TENDA (MAX IAS 185 kt) TO JOIN THE HOLDING TO 4000.

DESIGNADOR, RENUMERACIÓN.

CHANGES:

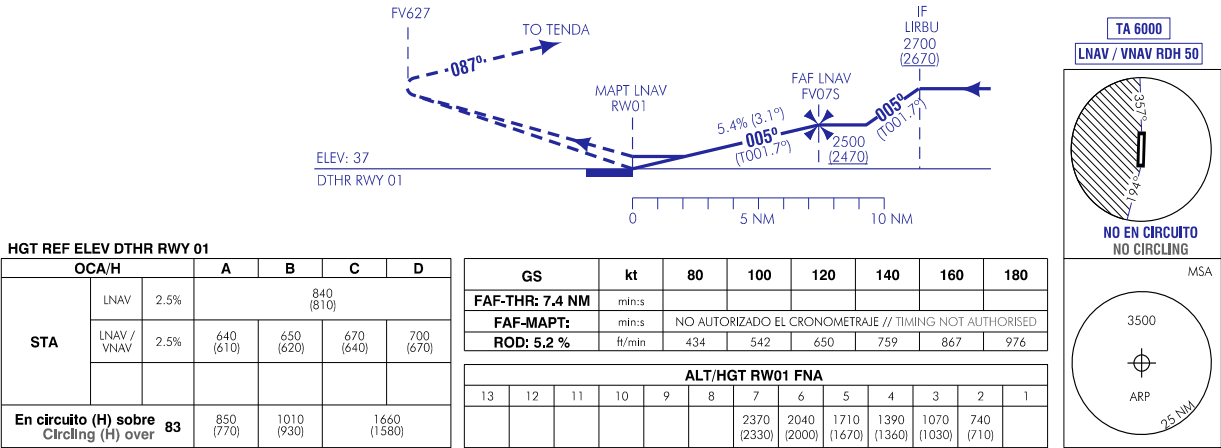

AERONAUTICAL DATABASE REQUIREMENTS

RNP Y RWY 01

WAYPOINTS COORDINATES

WPT	COORD
DEMEX	281201.8N 0135023.8W
FV07S (FAF LNAV)	281904.6N 0135205.6W
FV627	283047.2N 0135142.4W
LIRBU (IF)	281349.4N 0135215.9W
RW01 (MAPT LNAV)	282630.7N 0135150.8W
SOTAD (IAF)	275830.7N 0135118.5W
TENDA	283200.0N 0133826.4W
Non-precision final approach - Slope (Descent angle)	5.35% (3.06°)
APV Baro final approach (LNAV/VNAV) - Slope (Descent angle)	5.35% (3.06°)

NOTES APPLICABLE TO ALL APPROACHES:

- RNP APCH.
- Speed control:
 - a. Unless otherwise instructed by ATC, cross:
 - IAS 220 kt over IAF SOTAD;
 - IAS 210 kt at 12.0 NM from RW01;
 - IAS 190 kt at 9.0 NM from RW01;
 - IAS 160 kt at 4.0 NM from RW01.
 - b. If unable to comply, advise ATC on first contact.

PROCEDURE TABULAR DECRIPTION

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
SOTAD (IAF)											
001	IF	SOTAD	–	–	+2.9	–	–	+5000	-220	–	RNP APCH
002	TF	DEMEX	–	006 (003.4)	+2.9	13.5	–	+2700	-220	–	RNP APCH
003	TF	LIRBU	–	320 (317.3)	+2.9	2.4	–	+2700	-220	–	RNP APCH
004	TF	FV07S	–	005 (001.7)	+2.9	5.2	–	+2500	–	–	RNP APCH
005	TF	RW01	Y	005 (001.7)	+2.9	7.4	–	+87	–	-3.06/50	RNP APCH
006	DF	FV627	–	–	+2.9	–	–	–	-185	–	RNP APCH
007	TF	TENDA	–	087 (084.0)	+2.9	11.7	–	+4000	–	–	RNP APCH

HOLDING PATTERN

Path terminator	Waypoint identifier	Course/Track °M (°T)	Magnetic variation	Distance/ Outbound time	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navigation specification
HM	SOTAD	313 (310.2)	+2.9	–	L	5000	–	-220	RNAV1
HM	TENDA	245 (242.6)	+2.9	–	L	4000	–	–	RNAV1