

CARTA DE LLEGADA NORMALIZADA
VUELO POR INSTRUMENTOS (STAR)-OACI


TA 6000 ft

VAR 1°E (2025)

APP 118.350 MHz
TWR 118.350 MHz

ALMERÍA
RNAV RWY 25

AGIDO3Q	DOSEK2Q	ESILA3Q	KUNEN3G
	KUNEN2Q	RISPO2Q	VADAT2Q

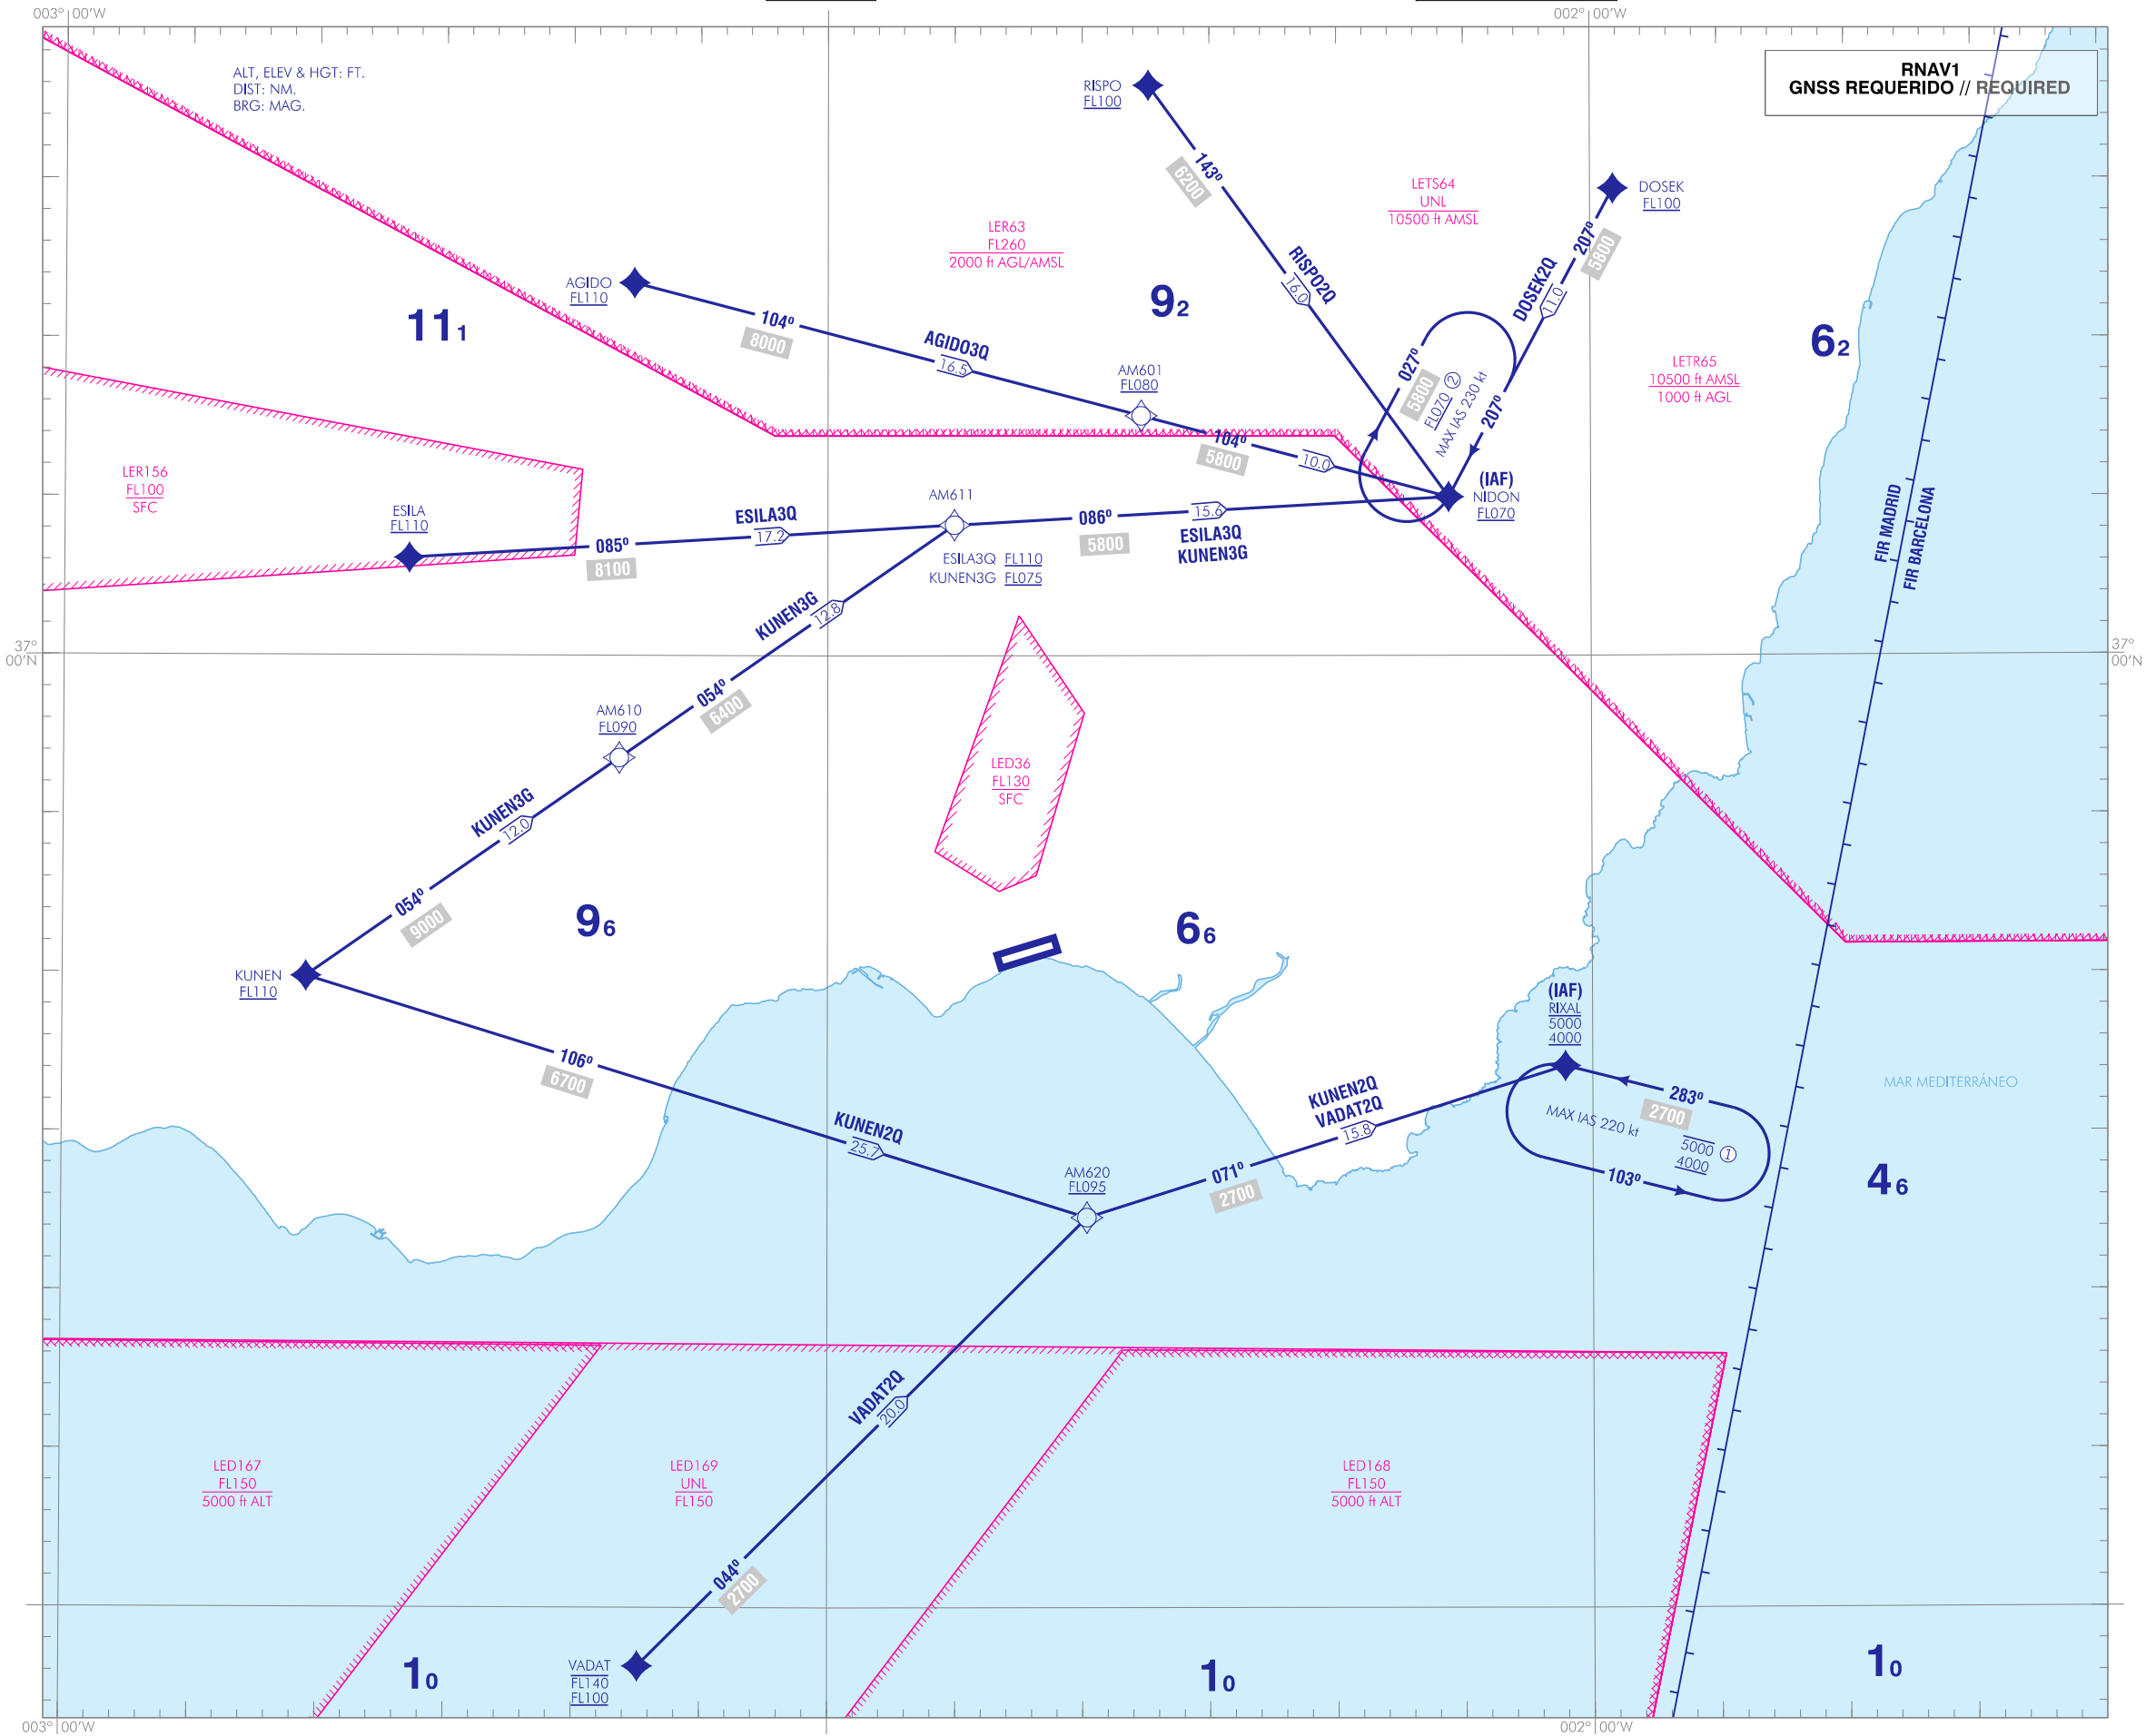

NOTAS:
① ALTITUD MÁXIMA DE ESPERA SUJETA A LA ACTIVIDAD DE LED168.
② ALTITUD MÍNIMA DE ESPERA SUJETA A LA ACTIVIDAD DE LER63.
- AGIDO3Q, DOSEK2Q, ESILA3Q, KUNEN3G Y RISPO2Q SUJETAS A LA ACTIVIDAD DE LA LER63.

NOTAS:
① HOLDING PATTERN MAXIMUM ALTITUDE SUBJECT TO LED168 ACTIVITY.
② HOLDING PATTERN MINIMUM ALTITUDE SUBJECT TO LER63 ACTIVITY.
- AGIDO3Q, DOSEK2Q, ESILA3Q, KUNEN3G AND RISPO2Q SUBJECT TO LER63 ACTIVITY.

CHANGES: MINIMUM ALTITUDE ESILA MOCA

WAYPOINTS COORDINATES

WPT	COORD
AGIDO	371144.5N 0023737.0W
AM601	370734.1N 0021740.7W
AM610	365647.2N 0023810.9W
AM611	370407.4N 0022501.4W
AM620	364218.2N 0021949.7W
DOSEK	371443.3N 0015906.3W
ESILA	370305.1N 0024626.9W
KUNEN	364954.3N 0025026.7W
NIDON	370500.5N 0020535.6W
RISPO	371759.0N 0021724.1W
RIXAL	364704.1N 0020104.2W
VADAT	362809.9N 0023724.9W

STANDARD INSTRUMENT ARRIVALS (STAR)

RUNWAY 25

NOTES APPLICABLE TO ALL STAR:

- RNAV1.
- GNSS required.

PROCEDURE TABULAR DESCRIPTION

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
AGIDO3Q Subject to LER63 activity.											
001	IF	AGIDO	–	–	-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM601	–	104 (104.6)	-1.0	16.5	–	+FL080	–	–	RNAV1
003	TF	NIDON	–	104 (104.8)	-1.0	10.0	–	+FL070	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
DOSEK2Q Subject to LER63 activity.											
001	IF	DOSEK	–	–	-1.0	–	–	+FL100	–	–	RNAV1
002	TF	NIDON	–	207 (208.2)	-1.0	11.0	–	+FL070	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
ESILA3Q Subject to LER63 activity.											
001	IF	ESILA	–	–	-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM611	–	085 (086.4)	-1.0	17.2	–	+FL110	–	–	RNAV1
003	TF	NIDON	–	086 (086.6)	-1.0	15.6	–	+FL070	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
KUNEN3G											
001	IF	KUNEN	–	–	-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM610	–	054 (054 .0)	-1.0	12.0	–	+FL090	–	–	RNAV1
003	TF	AM611	–	054 (054 .1)	-1.0	12.8	R	+FL075	–	–	RNAV1
004	TF	NIDON	–	086 (086.6)	-1.0	15.6	–	+FL070	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
KUNEN2Q Subject to LER63 activity.											
001	IF	KUNEN	–	–	-1.0	–	–	+FL110	–	–	RNAV1
002	TF	AM620	–	106 (107.0)	-1.0	25.7	–	+FL095	–	–	RNAV1
003	TF	RIXAL	–	071 (072.4)	-1.0	15.8	–	-5000 +4000	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
RISPO2Q Subject to LER63 activity.											
001	IF	RISPO	–	–	-1.0	–	–	+FL100	–	–	RNAV1
002	TF	NIDON	–	143 (143.9)	-1.0	16.0	–	+FL070	–	–	RNAV1

Serial number	Path Terminator	Waypoint identifier	Fly-over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	VPA/TCH (°/ft)	Navegation specification
VADAT2Q											
001	IF	VADAT	–	–	-1.0	–	–	-FL140 +FL100	–	–	RNAV1
002	TF	AM620	–	044 (045.0)	-1.0	20.0	–	+FL095	–	–	RNAV1
003	TF	RIXAL	–	071 (072.4)	-1.0	15.8	–	-5000 +4000	–	–	RNAV1

HOLDING PATTERN

Path terminator	Waypoint identifier	Course/Track °M (°T)	Magnetic variation	Distance/ Outbound time	Turn direction	MNM altitude (ft)	MAX altitude (ft)	Speed (kt)	Navigation specification
HM	NIDON	207 (208.0)	-1.0	1 min	R	FL070 (1)	–	-230	RNAV1
HM	RIXAL	283 (284.0)	-1.0	1 min	L	4000	5000 (2)	-220	RNAV1

Remarks:	
(1)	Subject to LER63 activity.
(2)	Subject to LED168 activity.